

# City of Raleigh



This document is a graphic representation only,  
created from the best available sources.  
The City of Raleigh assumes no responsibility for any errors,  
or misuse of this document.

## COA-0160-2019

### 501 E LANE ST A

### OAKWOOD (R-10)

0 35 70 140  
Feet



Nature of Project:  
Construct new house;  
install driveway; plant trees

APPLICANT:  
MIKE POUPARD  
5711 SIX FORKS RD, SUITE 103



## APPLICATION FOR A CERTIFICATE OF APPROPRIATENESS – STAFF REPORT

COA-0160-2019 501 E LANE STREET A

Applicant: MICHAEL POUPARD FOR GRAYSON HOMES LLC

Received: 12/03/2019

Meeting Date(s):

Submission date + 90 days: 03/02/2020

1) 01/23/2020 2) **2/27/2020** 3)

### INTRODUCTION TO THE APPLICATION

Historic District: OAKWOOD HISTORIC DISTRICT

Zoning: General HOD

Nature of Project: Construct new house; install driveway; install patio

DRAC: An application was reviewed by the Design Review Advisory Committee at its January 6, 2020 meeting. Members in attendance were Dan Becker, Sarah David, Jenny Harper and David Maurer; also present were Mike Poupard, applicant, David Kenoyer, and Collette Kinane and Tania Tully, staff.

#### Staff Notes:

- The demolition of the church formerly on the site was approved with 041-18-CA. The case is available for review.
- The subdivision of 501 E Lane Street has been approved by City Council through case S-48-18. New addresses for each parcel have not been provided.
- Due to a recent interpretation of State law by the City Attorney, a COA is not required for changes within the City right-of-way
- Changes made to the initial staff report appear in **bolded** text.
- **The following amended materials were provided: updated elevation and floorplan drawings; updated site plan; updated written description; window specifications; and updated built area calculations.**

### APPLICABLE SECTIONS OF GUIDELINES and DESCRIPTION OF PROJECT

<i>Sections</i>	<i>Topic</i>	<i>Description of Work</i>
1.3	Site Features and Plantings	Construct new house; install driveway; install patio
1.5	Walkways, Driveways, and Off-street Parking	Install driveway
3.3	New Construction	Construct new house

### STAFF REPORT

Based on the information contained in the application and staff's evaluation:

- A. Construction of a new house and installation of a driveway are not incongruous in concept according to *Guidelines* 1.3.2, 1.3.8, 1.3.12, 1.5.5, 1.5.6, 1.5.8, 3.3.1, 3.3.2, 3.3.6, 3.3.7, 3.3.8, 3.3.9, 3.3.10, 3.3.11, 3.3.12; however, the setbacks and height **may be** incongruous according to *Guidelines* 3.3.1, 3.3.7; and the following suggested facts:

## Siting

- 1\* The property is located near the center of the Oakwood Historic District.
- 2\* Unified Development Ordinance 5.4.1.E.1. states that “The minimum and maximum setbacks within the -HOD-G...shall be congruous with the setbacks of any typical well-related nearby building and structure within 1½ blocks and in the overlay district...” The *Design Guidelines* defines well-related nearby buildings as “Existing contributing buildings within 1-½ blocks of the subject property as measured parallel to the building-wall line in both directions and on both side streets.”
- 3\* The proposed setback from the **proposed** sidewalk along E Lane street is **15.2’**. **The proposed setback from the sidewalk along N East Street is approximately 22.4’**. A chart of setback distance for a few adjacent properties was included on the plot plan. The neighboring setbacks range from 14.9’ to 20.4’, with those in the 500-block ranging from 19.3’ to 20.4’. It is unclear if the provided neighboring setbacks were measured from the sidewalk or the right-of-way.
- 4\* The new house is oriented to face Lane Street and appears to maintain a similar spacing between buildings as between those to the east. The siting of the house was governed by the location of a wide drainage easement to the west and north.
- 5\* **A visual of how the new house is sited in comparison to the neighboring properties is not included.**
- 6\* **The setback chart does not include the well-related nearby buildings as defined in the Unified Development Ordinance (see fact \*2).**
- 7\* The design of the proposed house does not address the street front along N East Street, as a corner house would historically. **However, the applicant did provide photographs of three properties within the historic district that address the corner in a similar manner. 413-415 E Lane Street and 500 Polk Street are contributing properties. The photo provided of 500 N Boundary Street (incorrectly labeled as 536 N East) is a non-contributing property constructed in 2006 (175-05-CA).**
- 8\* **Built mass to open space analysis:** According to the applicant, the lot is 6,176 SF (0.142 acre). The footprint of the house will total approximately 2,263 SF; this includes the porches. The proportion of built mass to open space is proposed to be 36.6%.

- 9\* A page in the application labeled “Built Area and Built Mass Comparison” shows neighboring built mass percentages **ranging from 23.7% to 35.9%**.
- 10\* **Built area to open space analysis:** According to the applicant, the lot is 6,176 SF (0.142 acre). The proposed built area will total approximately **2,752 SF**; this includes the porches, patio, and driveway. The proportion of built area to open space is proposed to be **44.6%**.
- 11\* The built area percentage for nearby properties **ranges from 27.2% to 62.5%**.

### **Form and Design**

- 12\* The applicant proposes constructing a house with two stories in the front and one story in the rear. This is a common configuration in Oakwood for houses that have had additions. The neighboring houses on E Lane St are a mix of 1-story, 1 ½-story and 2-story designs.
- 13\* **Unified Development Ordinance 5.4.1.F.1. states that “Buildings and structures shall be congruous with the height of typical well-related nearby buildings and structures in the overlay district...as set forth in the historic development standards below or as defined in the designation documents or nomination.”**
- 14\* From the Special Character Essay of the Oakwood Historic District: “Thus Oakwood, which contains Raleigh’s only intact 19th-century neighborhood, is also a surprisingly diverse neighborhood of long-term change. Its evolution is painted across a broad canvas, diversity borne of architectural and topographical variety, bound into a cohesive whole through repetition of detail and style, and a consistently intimate rhythm established along continuous streetscapes of tree-sheltered sidewalks.”
- 15\* **Some** analysis of the proposed structure’s congruity with the character of Oakwood or well-related nearby properties was provided. **Evidence of the heights of well-related nearby buildings was not provided.**
- 16\* **Three** roof forms are found on the proposed design, each commonly found in Oakwood: **hip, shed and gable. The roof structures over the two-story portion and the front porch are hips. A cross gable over the one-story portion in the rear intersects the main roof. The side porch is covered by a shed roof.**
- 17\* **The hip roof over the front porch is supported by brackets appended to the east and west faces of the square supporting columns.**

## Materials and Details

- 18\* Composition shingle roofing is proposed. **Complete specifications and color were not provided.**
- 19\* The house is proposed to be clad with **smooth fiber cement** lap siding in both 4" and 7" exposures. **Trim is proposed to be smooth fiber cement or smooth composite.**
- 20\* Painted brick veneer is proposed for the foundation on the front porch. Neither specifications nor samples were provided.
- 21\* **The porch ceiling is proposed to be tongue-and-groove pine. The porch floor is proposed to be concrete or wood tongue-and-groove. The porch railing appears as a thin rail attached to the columns with no pickets. Details were not provided**
- 22\* The front facade of the house consists of evenly-spaced 3-over-1 windows on the second floor. Two six pane window **false** door units are located in the bays on either side of the front door. Proposed trim is traditional with flat casing on three sides and a sill at the bottom.
- 23\* Windows appear to be primarily vertically-oriented units of four sizes. **The window material is noted as aluminum-clad wood. Specifications were provided; however, the visual appearance of the aluminum cladding is unclear. The committee has found aluminum clad windows to be congruous when the finish is smooth painted rather than an anodized finish and when the seams are flush, not pronounced, and not significantly more visible than the seams on an all wood window.**
- 24\* The front door is proposed to be a 3/4-lite unit, while the east elevation includes a bank of four doors that appear to be oversize variants of the window style. A similar door in a narrower scale is also located on the north façade. It is unclear if the doors are full-lite. Door specifications were not provided.
- 25\* A covered porch is proposed at the rear of the east side of the house. The location is typical of those found in the district. **Detail drawings** were not provided.
- 26\* Eave and soffit construction details were not provided.
- 27\* The application states that materials will be painted. Paint samples were not provided.
- 28\* Exterior lighting was not shown on the drawings, nor were specifications provided.
- 29\* **Downspout locations are indicated on the elevation drawings. Gutters and downspout specifications** were not provided.

## Site and Setting

30\* From the Special Character Essay of the Oakwood Historic District: “Driveways themselves are most often gravel or concrete driving strips, squeezing beside the house to access the rear yard, and pushing the house close to the opposite side-lot line.”

31\* A new concrete **strip**, single-car-width driveway and curb cut are proposed to be installed behind the house with access from N East Street. This is a traditional location **and a traditional style** for a driveway on a corner property.

32\* No landscaping information on the property was provided.

33\* **HVAC equipment is proposed for the east side of the structure. This is a typical location for mechanical equipment. Screening details were not provided.**

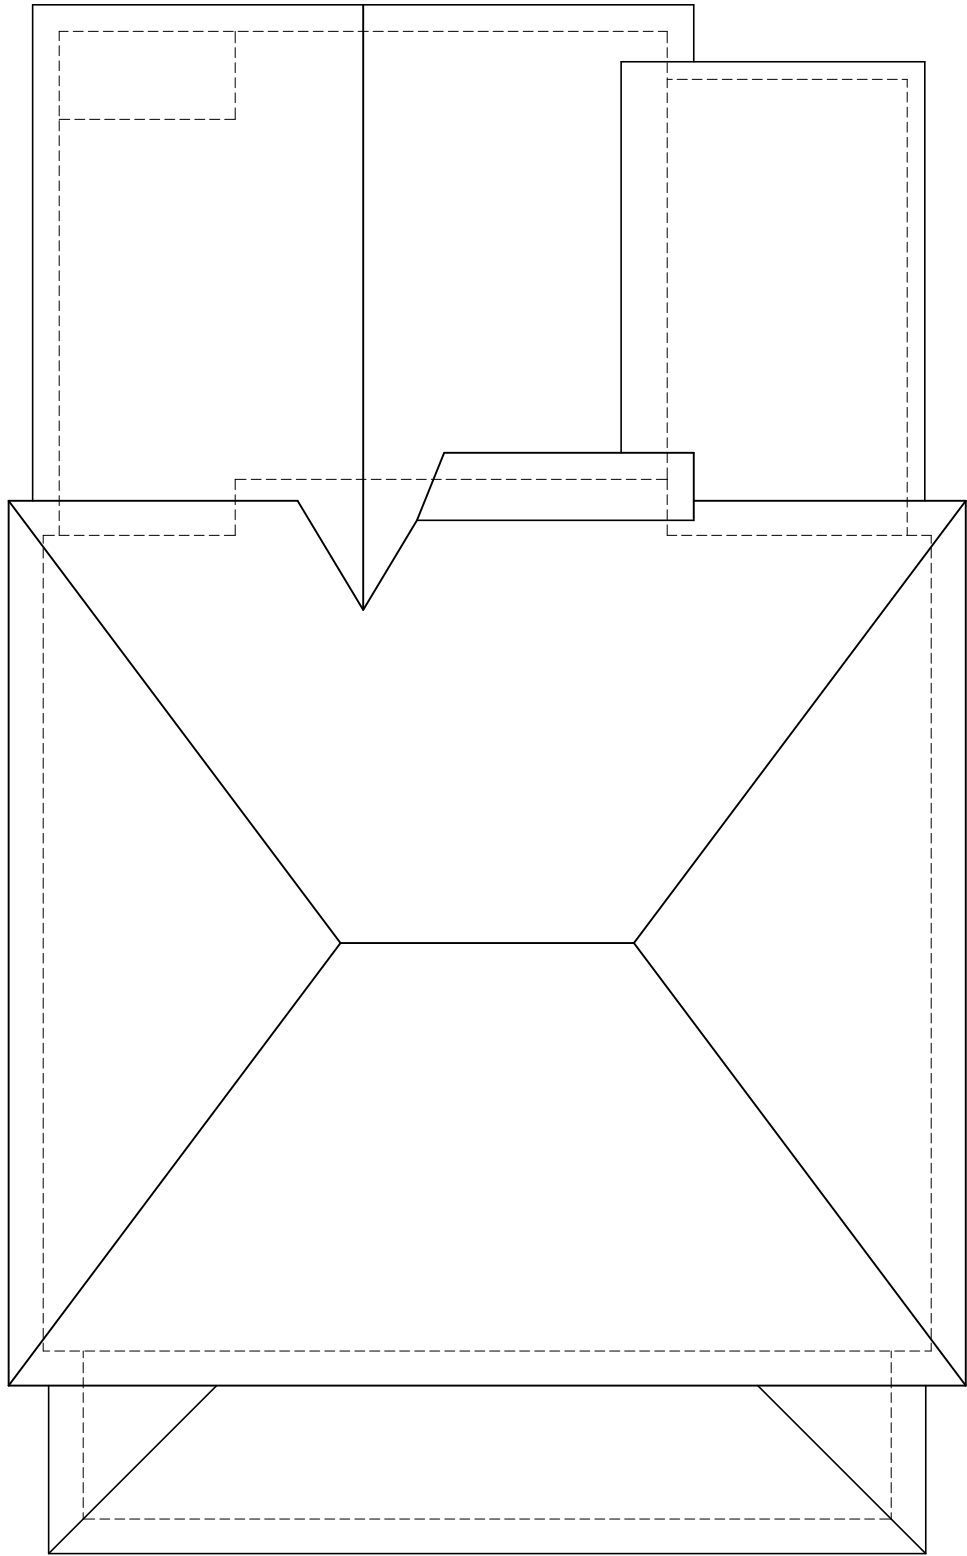
34\* A **concrete** walkway from the front sidewalk to the front porch is proposed. This is a traditional location.

**Pending receipt of evidence showing that the height and setback of the building are congruous with the setbacks and heights of any typical well-related nearby buildings, staff suggests that the Committee approve the application with the following conditions:**

1. That prior to the issuance of the blue placard the following be provided to and approved by staff:
  - a. Soffit construction;
  - b. Window specifications confirming that the aluminum clad windows have a smooth painted finish and that the seams are flush, not pronounced;
2. That detailed drawings and/or specifications for the following be provided to and approved by staff prior to installation or construction:
  - a. Roof color;
  - b. Trim at windows, doors and transitions between materials;
  - c. Brick specifications/sample for the color, size and bond pattern;
  - d. Paint and stain color swatches from paint manufacturer;
  - e. Doors, showing both section and elevation views, muntin profiles and material descriptions;
  - f. Porch railings and column details, showing both elevation and section views;


- g. Exterior lighting including locations on the building;**
- h. Finish specifications for the gutters and downspouts, and location on the building shown on elevation drawings;**
- i. House numbers, electric panel location, and all other exterior elements not included in the application**
- j. HVAC screening;**
- k. Landscaping plan (anything more than foundation plantings or trees should be submitted as a new COA application).**

Staff Contact: Collette Kinane, [collette.kinane@raleighnc.gov](mailto:collette.kinane@raleighnc.gov)




Roof Plan

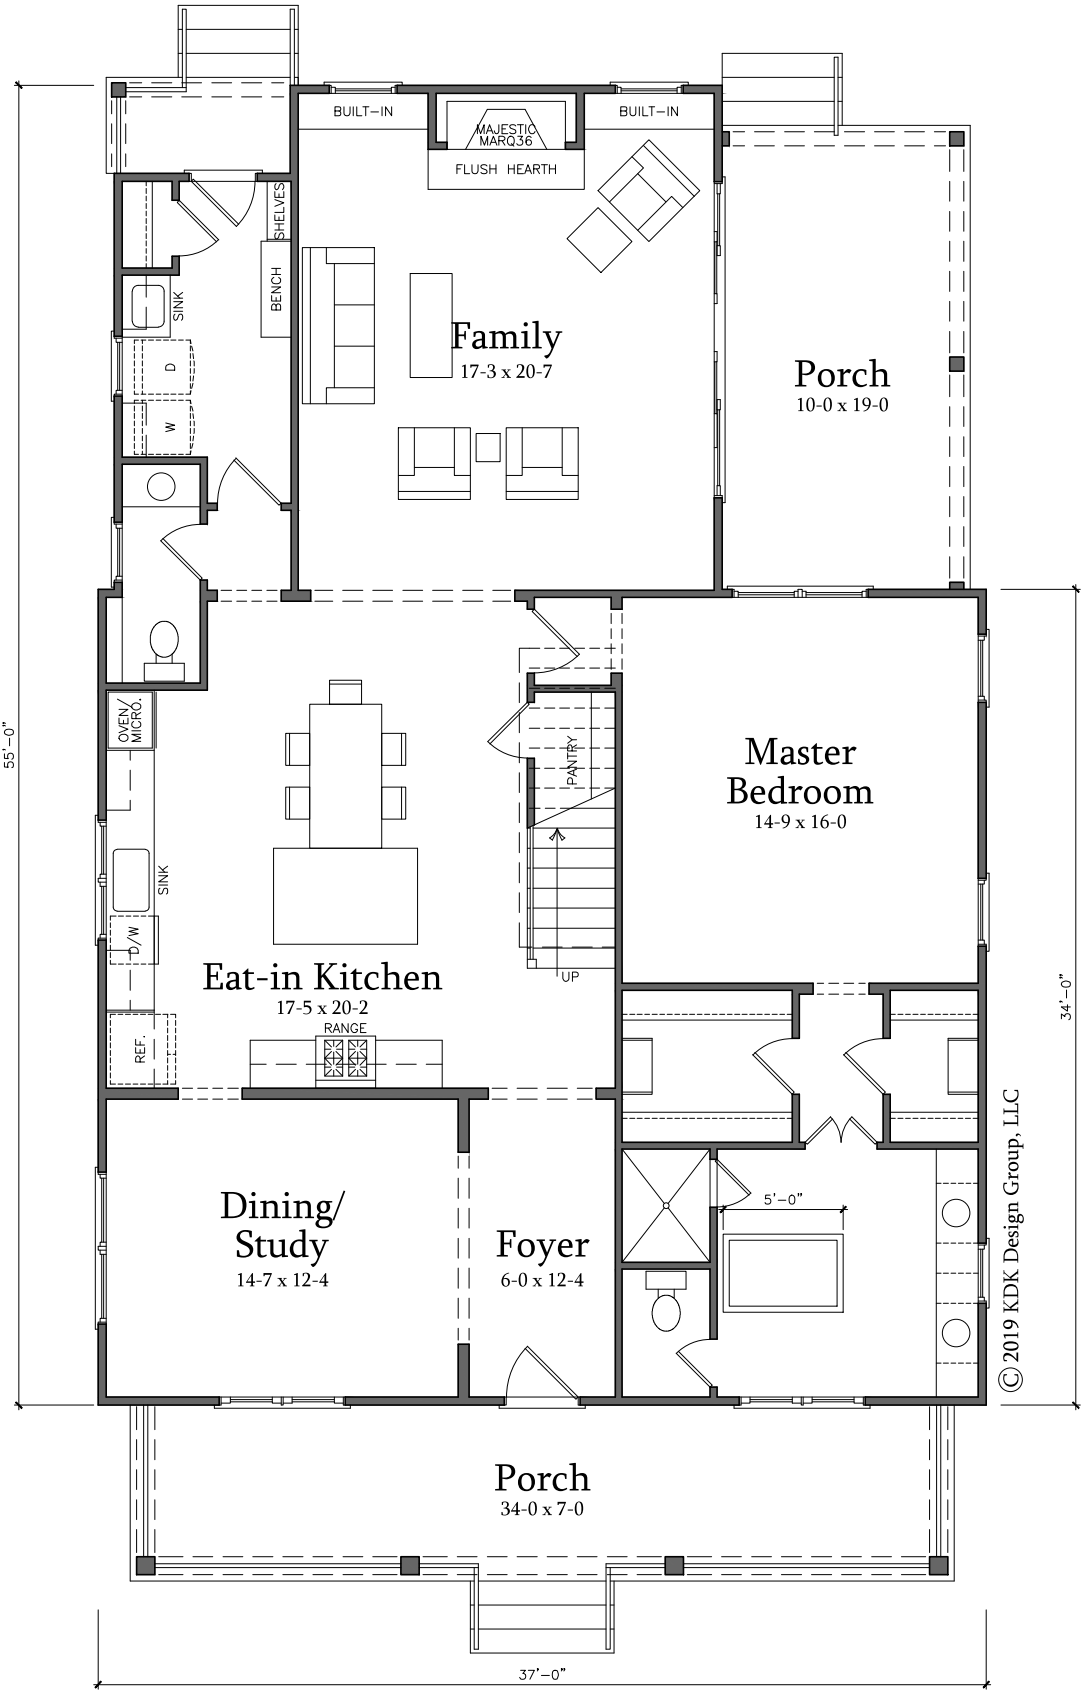1/8" = 1'-0"



First Floor Plan

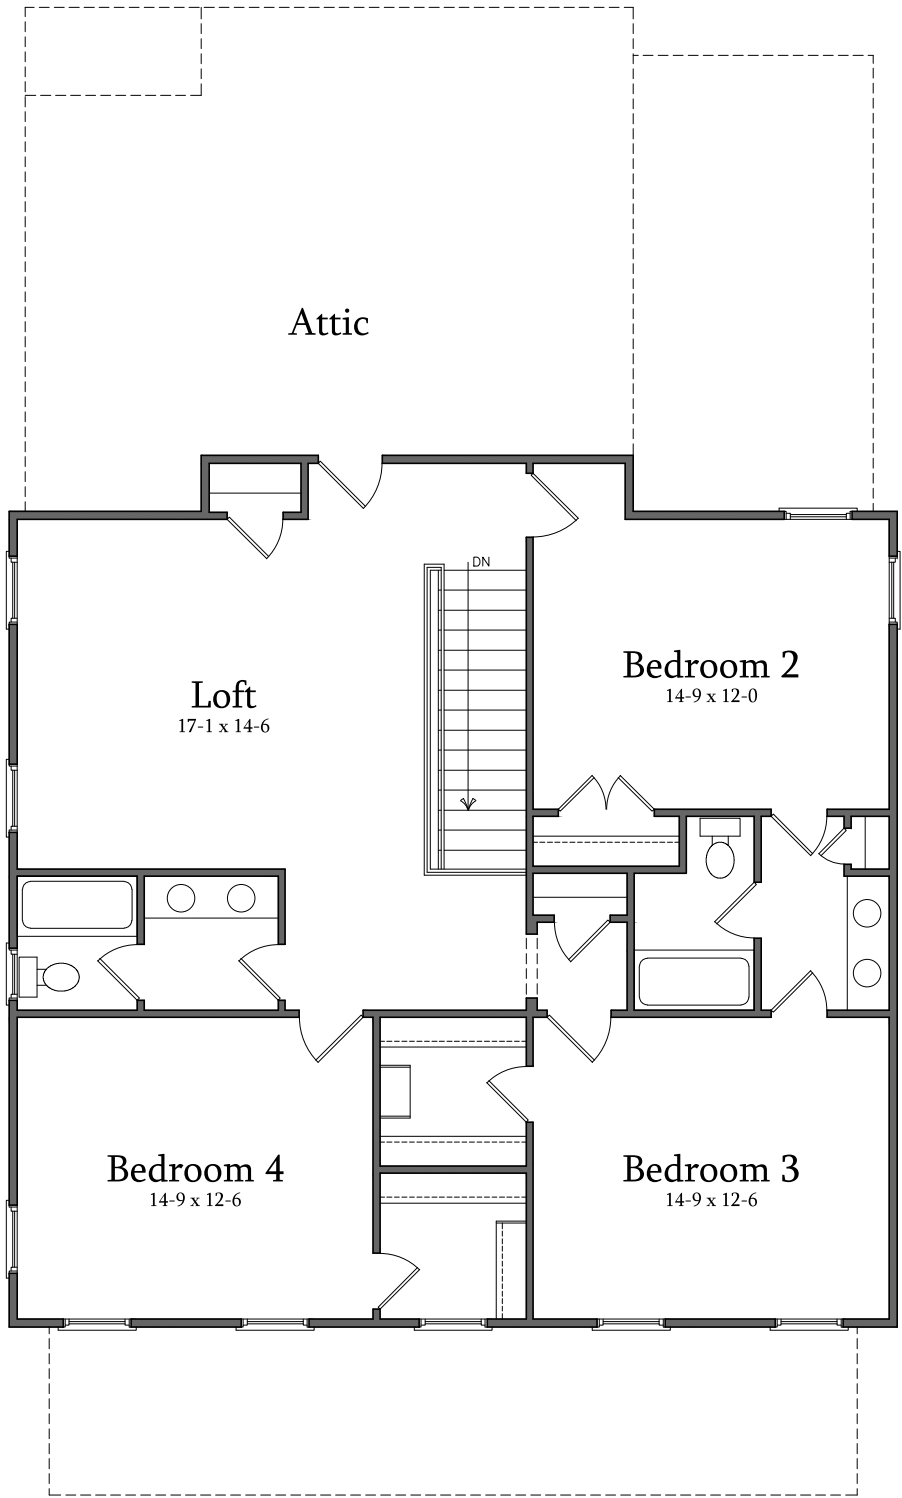1/8" = 1'-0"



Second Floor Plan

1/8" = 1'-0"

SQUARE FOOTAGE OUTSIDE FACE OF SHEATHING
1763 S.F. FIRST FLOOR CONDITIONED
1300 S.F. SECOND FLOOR CONDITIONED
3063 S.F. TOTAL CONDITIONED
236 S.F. FRONT PORCH
190 S.F. REAR PORCH
27 S.F. SIDE PORCH

KDK Design Group, LLC  
833 Woodburn Road  
Raleigh, North Carolina 27605  
919.301.8643  
kdkdesigngroup.com

Grayson Homes  
501 E. Lane Street - Raleigh, North Carolina


Lot 1



kdkdesign



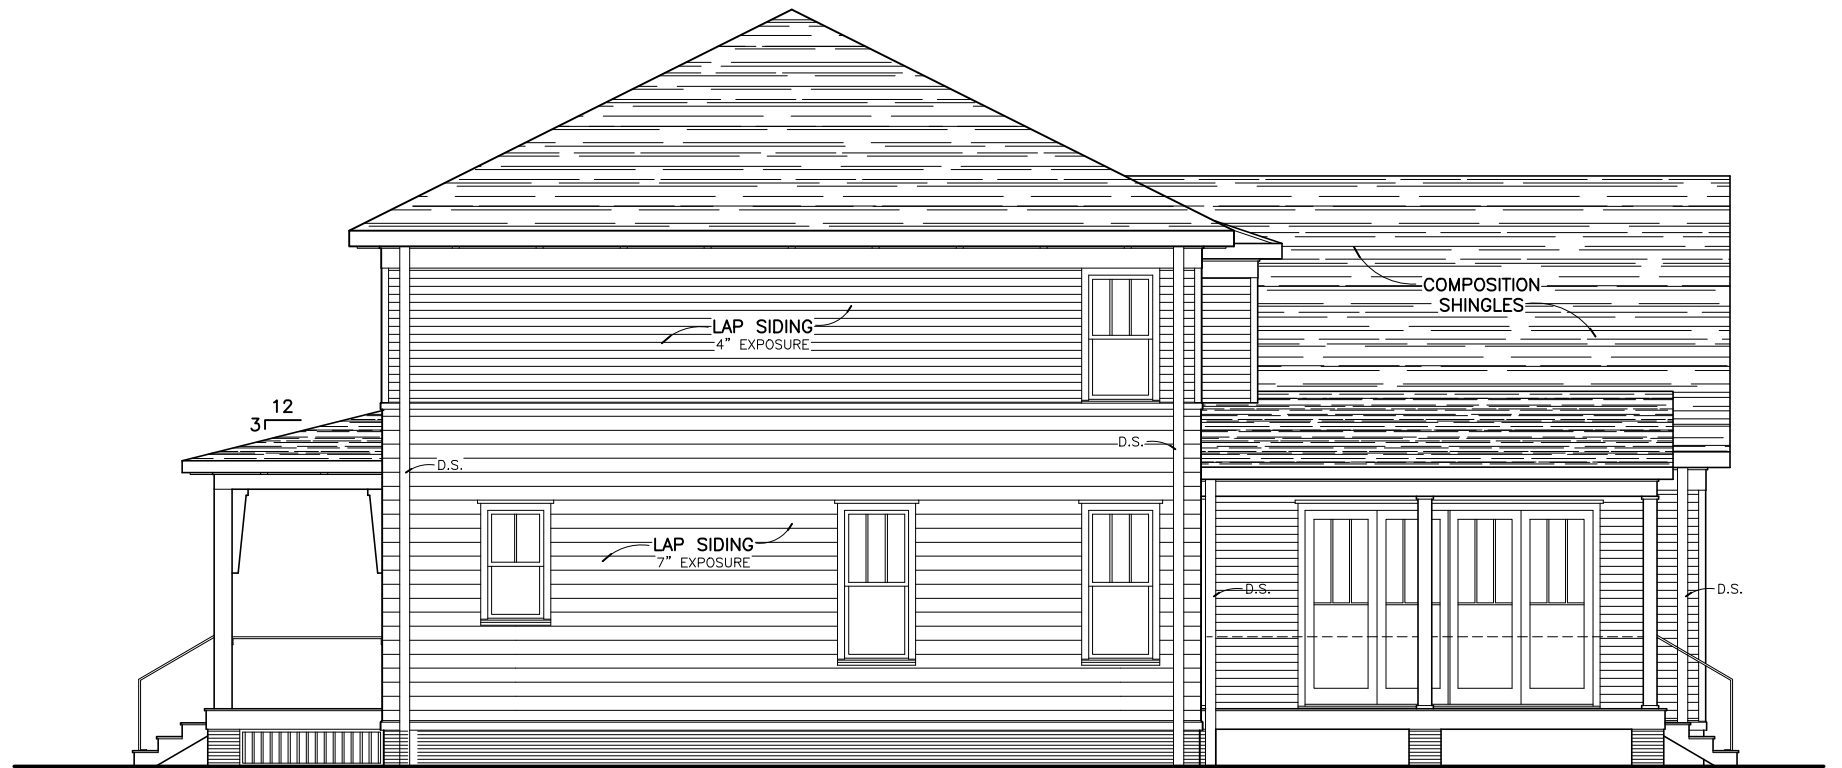**Rear Elevation**  
1/8" = 1'-0"



**Right Side Elevation**  
1/8" = 1'-0"



**Left Side Elevation**  
1/8" = 1'-0"



**Front Elevation**  
1/8" = 1'-0"

© 2019 KDK Design Group, LLC



## COA-0160-2019

### Specifications for Lot 1 (corner house)

- SETBACKS AND ELEVATIONS
  - Front and side setbacks within reason of similar homes. See chart.
  - Side elevation has been improved to show less wall by converting to a hip roof design. See elevation drawings. Side elevation is now congruous as seen with similar corner houses:



*413-415 E Lane St*



*536 N East*



500 Polk

- **GUIDELINES AND CONGRUITY**

- We are proposing a two story residence that is in keeping with scale and proportion of the homes in the area. We aren't recreating a historical copy, but an interpretive design that has roots in the historical styles, scale, proportions and applicable details. We have kept window placements, sizes, and proportions in context of the original homes in the area. The exterior materials are modern, but in keeping with the look of the original materials. We are trying to keep the intent as laid out in the design guidelines to ensure that the new construction is distinguishable from the original homes.
- We have reduced total mass facing side street by applying a hip roof, along with a back area of the house as one story. Many homes in the neighborhood have similar two story structures with rear additions dropped down to one story.
- Rear driveway congruous with other corner lots with rear driveways. Example is home at 501 Oakwood. Concrete strips in place of solid concrete fill.


- **WINDOWS AND DOORS**

- Windows to be Sierra Pacific H3 double hung wood windows with aluminum clad, color TBD. Brochure attached. 7/8" putty simulated divided lite, pattern as shown in drawings.
- Front door and porch false doors to be stained wood with glass as shown in drawings, stain TBD.
- Other exterior doors to be Sierra Pacific wood with aluminum clad, color to match windows. 7/8" putty simulated divided lite, pattern as shown on drawings.

- SHINGLES
  - Owens Corning Oakridge, Limited Lifetime Warranty, color TBD
- PORCHES
  - Ceilings to be 1x tongue and groove pine, color or stain TBD
  - Porch surface to be brick foundation with concrete or optional brick piers with wood tongue and groove flooring, option TBD
- GUTTERS
  - Standard gutters and downspouts, color TBD
- SIDING AND EXTERIOR TRIM
  - Fiber cement siding as per plans, smooth everywhere (no wood grain look). Color TBD
  - Trim boards to be either smooth fiber cement or smooth Miratec. Color TBD
  - Windows to be trimmed as shown with 5/4x4, smooth. Color TBD
- DRIVEWAYS AND SIDEWALKS
  - All driveway strips and sidewalks to be poured concrete
- FOUNDATION
  - Brick, color TBD



BUILT AREA AND BUILT MASS COMPARISON  
FOR GRAYSON HOMES



**Disclaimer**  
iMaps makes every effort to produce and publish the most current and accurate information possible. However, the maps are produced for information purposes, and are **NOT** surveys. No warranties, expressed or implied, are provided for the data therein, its use, or its interpretation.


ADDRESS	DISTANCE FROM HOUSE FACE TO RIGHT OF WAY
413	14.9'
513	19.3'
517	18.9'
519	18.0'
523	18.1'
525	20.4'

SURVEY FOR

GRAYSON HOMES

LOT 1 OF 501 EAST LANE STREET  
D.B. 17244, PAGE 1085  
CITY OF RALEIGH  
WAKE COUNTY, NORTH CAROLINA

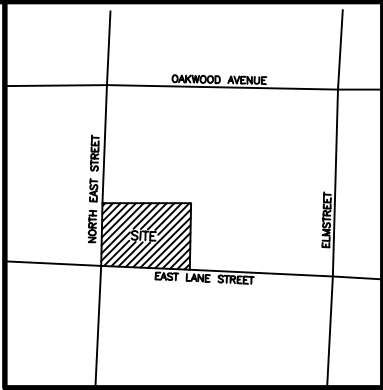FEBRUARY 4, 2020




VICINITY MAP



SCALE 1"=20'

N/F  
WILLIAM D. BECOM  
& TERESA BECOM  
D.B. 8669, PAGE 2418  
PIN# 1704.20-90-2510

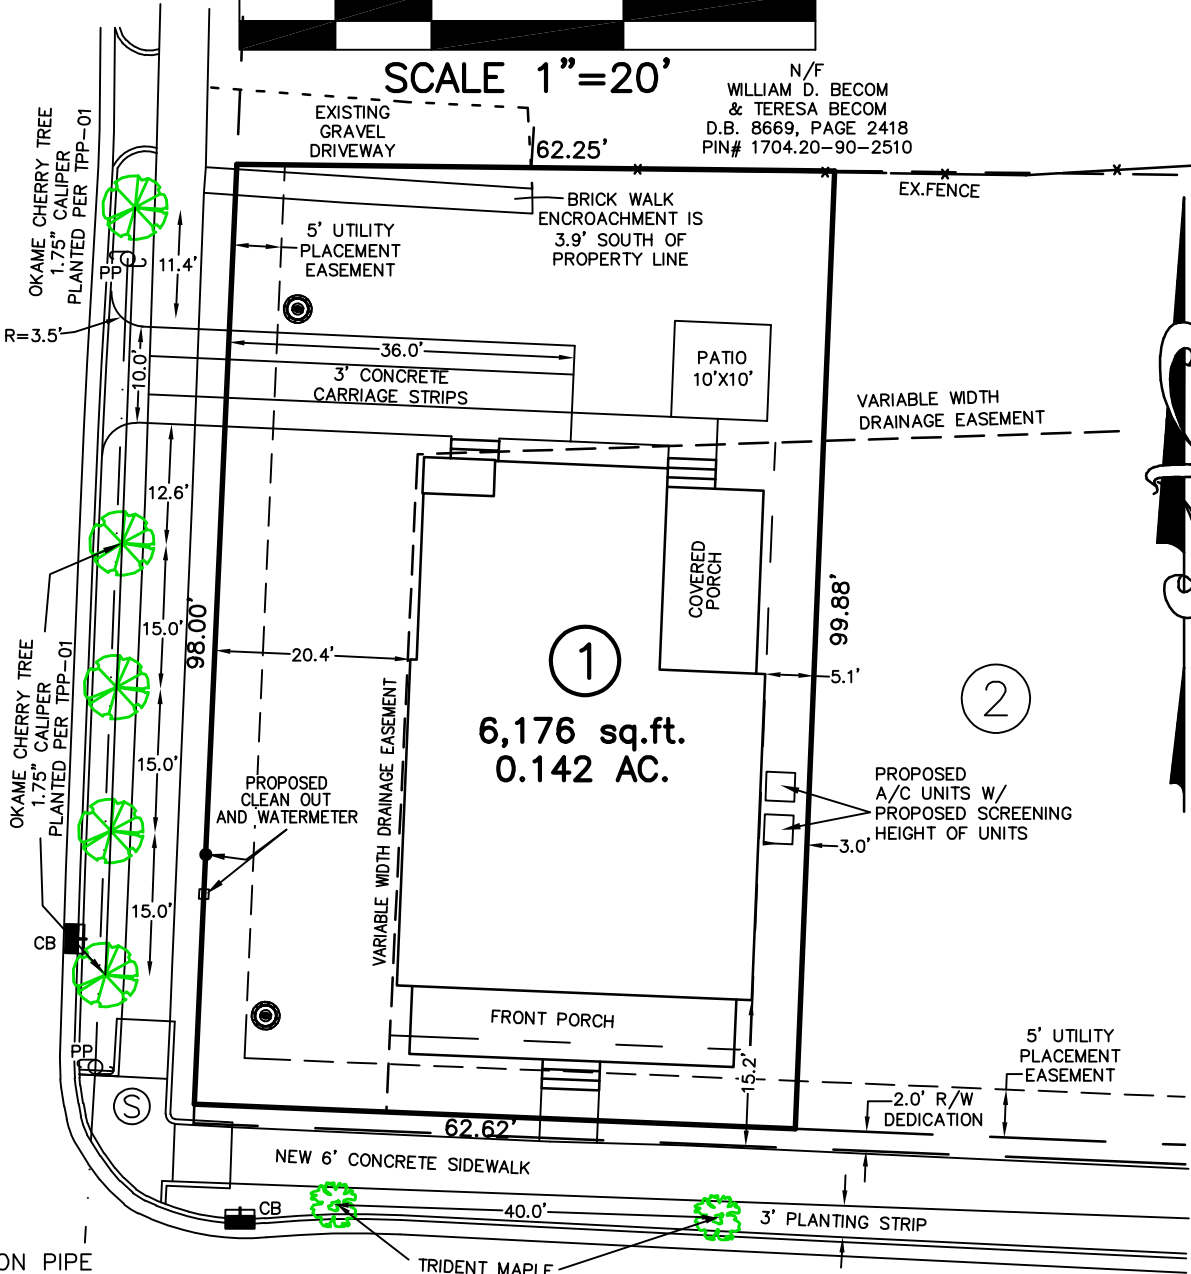NORTH EAST STREET VAIRABLE WIDTH R/W




LEGEND:

- EIP - EXISTING IRON PIPE
- EIB - EXISTING IRON BAR
- BEIP - BENT IRON PIPE
- BEIB - BENT IRON BAR
- CM - CONCRETE MONUMENT
- EPK - EXISTING PK NAIL
- SPK - SET PK NAIL
- NIP - NEW IRON PIPE SET
- R/W - RIGHT OF WAY
- CATV - CABLE TV BOX
- EB - ELECTRIC BOX
- TEL - TELEPHONE PEDESTAL
- PP - POWER POLE
- OHL - OVERHEAD LINE
- LP - LIGHT POLE
- WM - WATER METER
- WV - WATER VALVE
- CO - SEWER CLEAN-OUT

EAST LANE STREET VAIRABLE WIDTH R/W

IMPERVIOUS SURFACE TABLE

FRONT PORCH	239 S.F.
HOUSE	1,763 S.F.
COVERED PORCH	192 S.F.
STOOP	28 S.F.
DRIVEWAY	217 S.F.
SIDEWALKS	71 S.F.
PATIO	100 S.F.
MISC/UTILITIES	142 S.F.
TOTAL IMPERVIOUS AREA	2,752 S.F.
TOTAL LOT AREA	6,176 S.F.
PERCENTAGE OF IMPERVIOUS AREA	44.55%



**CMP**

CAWTHORNE, MOSS  
& PANCIERA, P.C.

Professional Land Surveyors  
C-1525  
333 S. White Street  
Post Office Box 1253  
Wake Forest, N.C. 27588  
(919)556-3148

I DECLARE THAT THIS SURVEY COMPLIES WITH THE NORTH CAROLINA STANDARDS OF PRACTICE FOR SURVEYING, (SECTION 1600) FOR CLASS A SURVEYS AND THAT THE CALCULATED RATIO OF PRECISION BEFORE ADJUSTMENTS IS 1:10,000+. FURTHERMORE, PROPERTY CORNERS SHOWN ARE PRIMARY CONTROL MONUMENTATION FOR THE RE-ESTABLISHMENT OF PROPERTY CORNERS IN THE ABSENCE OF GRID MONUMENTS AND OTHER SUBDIVISION PROPERTY CORNERS. THIS SURVEY IS NOT TO BE RECORDED WITHOUT THE WRITTEN AUTHORIZATION OF THE SURVEYOR.

PRELIMINARY

FOR REVIEW PURPOSES ONLY

PROFESSIONAL LAND SURVEYOR L-

ADOPTED FROM D.B. 17244, PAGE 1085

# H3 Double Hung



At the core of the H3 Double Hung is our patented Fusion Technology™. It integrates three materials—extruded aluminum, vinyl and solid wood—into one complete window. This unique fusion results in improved durability and performance, noticeably enhanced aesthetics, an extreme seal and easier installation.

## Standard Construction:

- 0.055" thick extruded aluminum exterior.
- Hidden, extra-strong 0.078" thick extruded vinyl main frame with integral nail fin, fully welded at four corners for air and water tight seal.
- 5-3/4" overall frame depth with standard solid 4-9/16" jamb depth.
- 1-3/4" sash thickness, with narrow 1-5/8" stile and rail and 1-1/8" architectural sash setback.
- Seamless factory mulling up to 5-wide (120") with continuous head and sill with mull post. Optional factory box (jamb-to-jamb) mulling up to 4-wide (132").
- Both sash operate and tilt in for easy cleaning.
- Concealed jamb liners with constant force balances.
- Innovative, narrow profile, removable Flexscreen.

MINIMUM / MAXIMUM FRAME SIZES			
Custom sizing available in 1/16" increments. Additional sizes may be available upon approval.			
H3 DOUBLE HUNG - OPERATING		H3 DOUBLE HUNG - PICTURE	
Minimum Frame Width	17.5"	Minimum Frame Width	13.5"
Minimum Frame Height	35.5"	Minimum Frame Height	35.5"
Maximum Frame Width	47.5"	Maximum Frame Width	84"
Maximum Frame Height	83.5"	Maximum Frame Height	84"
		Maximum Square Feet	42



Pictured: H3 Double Hung with offset frame.

## Performance Data:



### H3 Double Hung: 47.5" x 83.5"

AIR INFILTRATION.....0.05/0.03/A3  
 WATER.....NO LEAKAGE @ 7.52 PSF  
 STRUCTURAL.....LC-PG50 (+50/-50)



### H3 Double Hung Picture: 71.5" x 83.5"

AIR INFILTRATION.....0.06/0.02/A3  
 WATER.....NO LEAKAGE @ 5.43PSF  
 STRUCTURAL.....CW-PG35 (+35/-35)\*\*



### H3 Double Hung: 119.5" x 83.5" (3-wide Unit)

AIR INFILTRATION.....0.06/0.06/A3  
 WATER.....NO LEAKAGE @ 5.43 PSF  
 STRUCTURAL.....LC-PG35 (+35/-35)\*

For a comprehensive list of tested and rated sizes and configurations, please refer to the H3 Double Hung Product Performance Guide (Structural) located in the Technical Resources Library on our website.

\*Unit size will meet LC-PG50 with installation straps.

\*\*Unit size will meet CW-PG50 if quoted with performance upgrades.

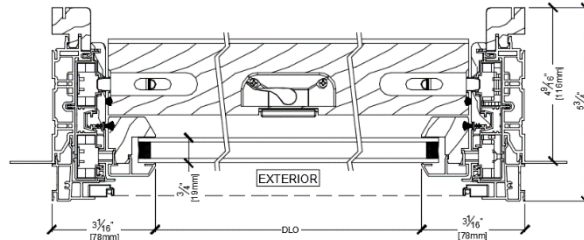
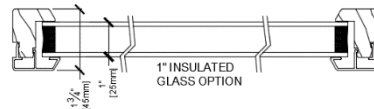
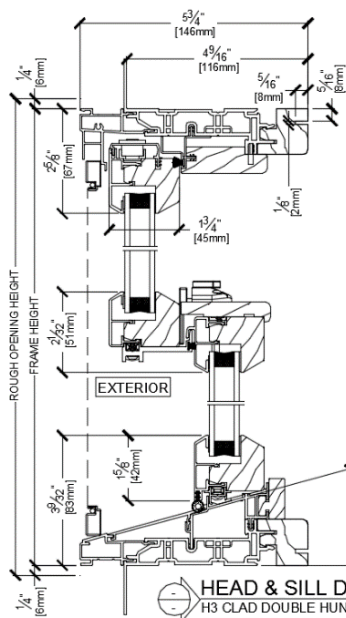
## Thermal Performance (NFRC):

Air Filled			Argon Filled		
<b>Low-E Clear</b>	<b>Low-E 366</b>	<b>Triple IG LE/CL/LE</b>	<b>Low-E Clear</b>	<b>Low-E 366</b>	<b>Triple IG LE/CL/LE</b>
U-FACTOR.....0.33	U-FACTOR.....0.33	U-FACTOR.....0.27	U-FACTOR.....0.30	U-FACTOR.....0.30	U-FACTOR.....0.24
SHGC.....0.28	SHGC.....0.21	SHGC.....0.27	SHGC.....0.28	SHGC.....0.21	SHGC.....0.27
VT.....0.52	VT.....0.49	VT.....0.43	VT.....0.52	VT.....0.49	VT.....0.43
CR......52	CR......52	CR......62	CR......53	CR......56	CR......65


All values represent insulated glass units using standard black warm edge spacer. Additional glazing options available.

For a comprehensive list of glazing configurations, please refer to the H3 Double Hung Product Performance Guide (NFRC) located in the Technical Resources Library on our website.


**Operating**  
FLUSH FRAME - 4 9/16" JAMB W/ Kerf



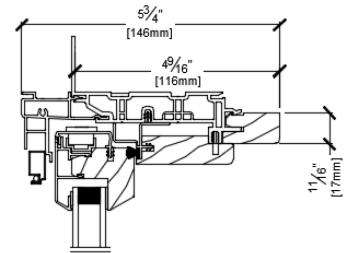
**Operating**  
OFFSET FRAME - 4 9/16" JAMB



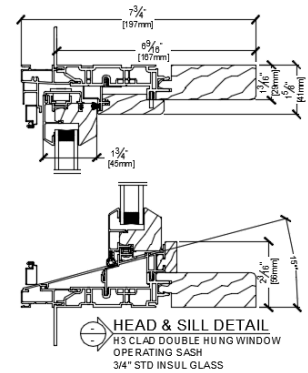**Operating**  
FLUSH FRAME - 6 9/16" JAMB (1 PIECE)



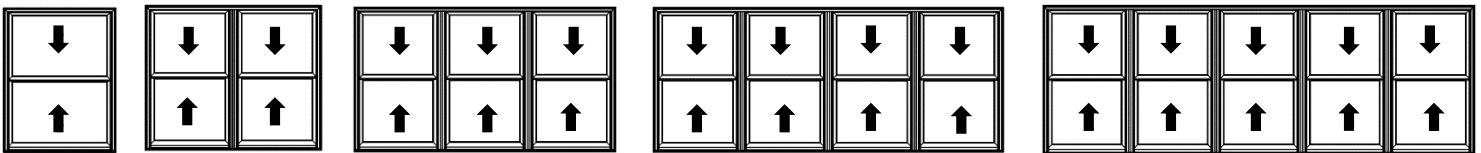Additional product details may be found on our website [www.sierrapacificwindows.com/ProfessionalResources/TechnicalLibrary](http://www.sierrapacificwindows.com/ProfessionalResources/TechnicalLibrary)



Typical configurations shown. Contact us for additional options.

**Factory mulling up to 5-wide (120") continuous head & sill with mull post. Up to 4-wide (132") as tight (jamb-to-jamb) box mulls.**



Continuous Head & Sill Mull Post



Tight Mull



1/4" Plate Mull

**OPTIONAL EXTERIOR CASINGS**



3.5" Flat Casing



2" Oval



2" Flat Casing



2" Brickmould

**H3 Double Hung Additional Features**

- Color Palette of 75 colors in powder coated AAMA 2604, optional AAMA 2605.
- Extensive offering of performance glass available in black warm edge or Cardinal spacer for optimum efficiency.
- Grille options including Simulated Divided Lites and Grilles-Between-Glass.
- Factory finished Ultra Coat Paint or Ultra Stain interior.

















































Please visit our website [www.sierrapacificwindows.com](http://www.sierrapacificwindows.com) for additional details or to contact your nearest Sierra Pacific Branch or Dealer location.

Place Business Card or  
Company Information Here

H3 2.0 Aluminum Clad Double Hung, Operating

Scale: 1/4" = 1'

Elevations Viewed from Exterior

ROUGH OPENING (mm)								
	1'-6" (457)	1'-10" (559)	2'-0" (610)	2'-2" (660)	2'-4" (711)	2'-6" (762)	2'-8" (813)	2'-10" (864)
	1'-5 1/2" (445)	1'-9 1/2" (546)	1'-11 1/2" (597)	2'-1 1/2" (648)	2'-3 1/2" (699)	2'-5 1/2" (749)	2'-7 1/2" (800)	2'-9 1/2" (851)
	12 3/8" (314)	16 3/8" (416)	18 3/8" (467)	20 3/8" (518)	22 3/8" (568)	24 3/8" (619)	26 3/8" (670)	28 3/8" (721)
B.U.S. (mm)								
GLASS (mm)								
3'-0" (914)								
3'-4" (1016)								
3'-8" (1118)								
4'-0" (1219)								
4'-4" (1321)								
4'-8" (1422)								
	C-H3DH-18x36	C-H3DH-22x36	C-H3DH-24x36	C-H3DH-26x36	C-H3DH-28x36	C-H3DH-30x36	C-H3DH-32x36	C-H3DH-34x36
	C-H3DH-18x40	C-H3DH-22x40	C-H3DH-24x40	C-H3DH-26x40	C-H3DH-28x40	C-H3DH-30x40	C-H3DH-32x40	C-H3DH-34x40
	C-H3DH-18x44	C-H3DH-22x44	C-H3DH-24x44	C-H3DH-26x44	C-H3DH-28x44	C-H3DH-30x44	C-H3DH-32x44	C-H3DH-34x44
	C-H3DH-18x48	C-H3DH-22x48	C-H3DH-24x48	C-H3DH-26x48	C-H3DH-28x48	C-H3DH-30x48	C-H3DH-32x48	C-H3DH-34x48
	C-H3DH-18x52	C-H3DH-22x52	C-H3DH-24x52	C-H3DH-26x52	C-H3DH-28x52	C-H3DH-30x52	C-H3DH-32x52	C-H3DH-34x52
	C-H3DH-18x56	C-H3DH-22x56	C-H3DH-24x56	C-H3DH-26x56	C-H3DH-28x56	C-H3DH-30x56	C-H3DH-32x56	C-H3DH-34x56

**E = Egress** Egress Data  
Opening specifications have been provided to assist you in determining compliance to Egress codes based on BOCA and UBC code requirements as follows.

1. The units must be operable from the inside without the use of separate tools.
2. All egress from sleeping rooms must have a minimum net clear opening of 5.7 square feet.
3. The minimum net clear opening height dimension shall be 24".  
The minimum net clear opening width dimension shall be 20".
4. The Floor To Sill Height is calculated by measuring from the clear opening sill (when unit is open) to the floor. This height cannot be more than 44" above the floor.

H3 2.0 Aluminum Clad Double Hung, Operating

Scale: 1/4" = 1'

Elevations Viewed from Exterior

ROUGH OPENING (mm)	1'-6" (457)	1'-10" (559)	2'-0" (610)	2'-2" (660)	2'-4" (711)	2'-6" (762)	2'-8" (813)	2'-10" (864)
	1'-5 1/2" (445)	1'-9 1/2" (546)	1'-11 1/2" (597)	2'-1 1/2" (648)	2'-3 1/2" (699)	2'-5 1/2" (749)	2'-7 1/2" (800)	2'-9 1/2" (851)
	12 3/8" (314)	16 3/8" (416)	18 3/8" (467)	20 3/8" (518)	22 3/8" (568)	24 3/8" (619)	26 3/8" (670)	28 3/8" (721)
	GLASS (mm)							
5'-0" (1524)								
	C-H3DH-18x60	C-H3DH-22x60	C-H3DH-24x60	C-H3DH-26x60	C-H3DH-28x60	C-H3DH-30x60	C-H3DH-32x60	C-H3DH-34x60
5'-4" (1626)								
	C-H3DH-18x64	C-H3DH-22x64	C-H3DH-24x64	C-H3DH-26x64	C-H3DH-28x64	C-H3DH-30x64	C-H3DH-32x64	C-H3DH-34x64
5'-8" (1727)								
	C-H3DH-18x68	C-H3DH-22x68	C-H3DH-24x68	C-H3DH-26x68	C-H3DH-28x68	C-H3DH-30x68	C-H3DH-32x68	C-H3DH-34x68
6'-0" (1829)								
	C-H3DH-18x72	C-H3DH-22x72	C-H3DH-24x72	C-H3DH-26x72	C-H3DH-28x72	C-H3DH-30x72	C-H3DH-32x72	C-H3DH-34x72

**E = Egress**  
Egress Data  
Opening specifications have been provided to assist you in determining compliance to Egress codes based on BOCA and UBC code requirements as follows.

- The units must be operable from the inside without the use of separate tools.
- All egress from sleeping rooms must have a minimum net clear opening of 5.7 square feet.
- The minimum net clear opening height dimension shall be 24".  
The minimum net clear opening width dimension shall be 20".
- The Floor To Sill Height is calculated by measuring from the clear opening sill (when unit is open) to the floor. This height cannot be more than 44" above the floor.

H3 2.0 Aluminum Clad Double Hung, Operating

Scale: 1/4" = 1'

Elevations Viewed from Exterior

ROUGH OPENING (mm)	1'-6" (457)	1'-10" (559)	2'-0" (610)	2'-2" (660)	2'-4" (711)	2'-6" (762)	2'-8" (813)	2'-10" (864)
	1'-5 1/2" (445)	1'-9 1/2" (546)	1'-11 1/2" (597)	2'-1 1/2" (648)	2'-3 1/2" (699)	2'-5 1/2" (749)	2'-7 1/2" (800)	2'-9 1/2" (851)
	12 3/8" (314)	16 3/8" (416)	18 3/8" (467)	20 3/8" (518)	22 3/8" (568)	24 3/8" (619)	26 3/8" (670)	28 3/8" (721)
B.U.S. (mm)	6'-4" (1930)	6'-3 1/2" (1918)	6'-3 1/2" (1918)	6'-3 1/2" (1918)	6'-3 1/2" (1918)	6'-3 1/2" (1918)	6'-3 1/2" (1918)	6'-3 1/2" (1918)
GLASS (mm)	34 13/16" (884)	34 13/16" (884)	34 13/16" (884)	34 13/16" (884)	34 13/16" (884)	34 13/16" (884)	34 13/16" (884)	34 13/16" (884)
	C-H3DH-18x76	C-H3DH-22x76	C-H3DH-24x76	C-H3DH-26x76	C-H3DH-28x76	C-H3DH-30x76	C-H3DH-32x76	C-H3DH-34x76
	C-H3DH-18x80	C-H3DH-22x80	C-H3DH-24x80	C-H3DH-26x80	C-H3DH-28x80	C-H3DH-30x80	C-H3DH-32x80	C-H3DH-34x80
	C-H3DH-18x84	C-H3DH-22x84	C-H3DH-24x84	C-H3DH-26x84	C-H3DH-28x84	C-H3DH-30x84	C-H3DH-32x84	C-H3DH-34x84

E = Egress

Egress Data

Opening specifications have been provided to assist you in determining compliance to Egress codes based on BOCA and UBC code requirements as follows.

1. The units must be operable from the inside without the use of separate tools.

2. All egress from sleeping rooms must have a minimum net clear opening of 5.7 square feet.


3. The minimum net clear opening height dimension shall be 24".  
The minimum net clear opening width dimension shall be 20".

4. The Floor To Sill Height is calculated by measuring from the clear opening sill (when unit is open) to the floor. This height cannot be more than 44" above the floor.

H3 2.0 Aluminum Clad Double Hung, Operating

Scale: 1/4" = 1'

Elevations Viewed from Exterior

ROUGH OPENING (mm)						
	3'-0" (914)	3'-2" (965)	3'-4" (1016)	3'-6" (1067)	3'-8" (1118)	3'-10" (1168)
	2'-11 1/2" (902)	3'-1 1/2" (953)	3'-3 1/2" (1003)	3'-5 1/2" (1054)	3'-7 1/2" (1105)	3'-9 1/2" (1156)
	30 3/8" (772)	32 3/8" (822)	34 3/8" (873)	36 3/8" (924)	38 3/8" (975)	40 3/8" (1026)
B.U.S. (mm)	3'-0" (914)	2'-11 1/2" (902)	3'-4" (1016)	3'-6" (1067)	3'-8" (1118)	3'-10" (1168)
GLASS (mm)	14 13/16" (376)	16 13/16" (427)	18 13/16" (478)	20 13/16" (529)	22 13/16" (579)	24 13/16" (630)
	C-H3DH-36x36	C-H3DH-38x36	C-H3DH-40x36	C-H3DH-42x36	C-H3DH-44x36	C-H3DH-46x36
	C-H3DH-36x40	C-H3DH-38x40	C-H3DH-40x40	C-H3DH-42x40	C-H3DH-44x40	C-H3DH-46x40
	C-H3DH-36x44	C-H3DH-38x44	C-H3DH-40x44	C-H3DH-42x44	C-H3DH-44x44	C-H3DH-46x44
	C-H3DH-36x48	C-H3DH-38x48	C-H3DH-40x48	C-H3DH-42x48	C-H3DH-44x48	C-H3DH-46x48
	C-H3DH-36x52	C-H3DH-38x52	C-H3DH-40x52	C-H3DH-42x52	C-H3DH-44x52	C-H3DH-46x52
	C-H3DH-36x56	C-H3DH-38x56	C-H3DH-40x56	C-H3DH-42x56	C-H3DH-44x56	C-H3DH-46x56

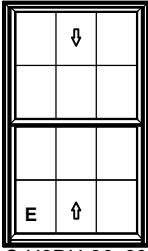
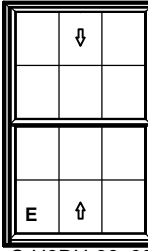
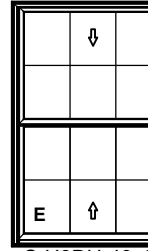
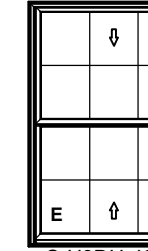
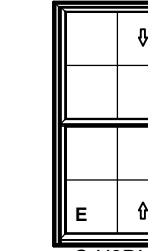
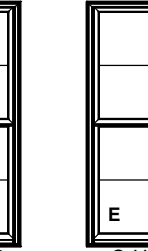
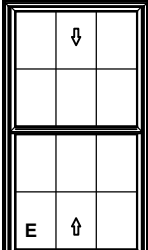
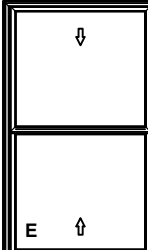
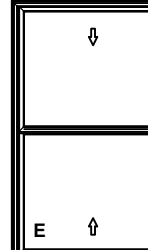
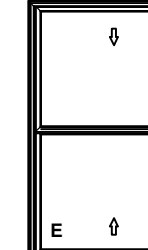
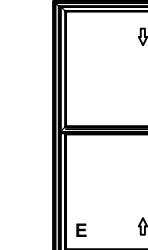
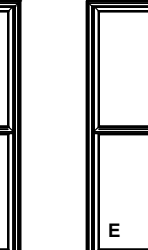
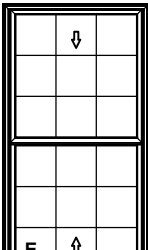
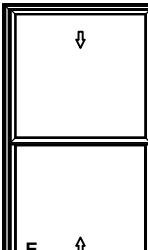
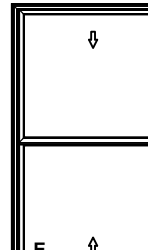

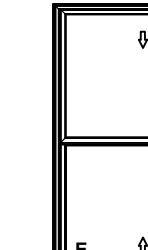

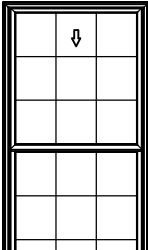
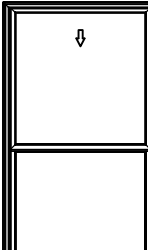
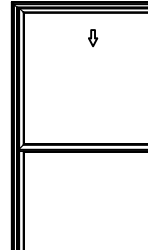
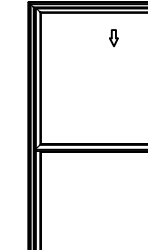
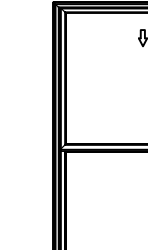
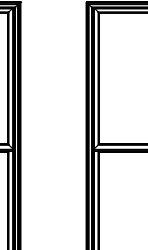
**E = Egress**  
Egress Data  
Opening specifications have been provided to assist you in determining compliance to Egress codes based on BOCA and UBC code requirements as follows.

1. The units must be operable from the inside without the use of separate tools.
2. All egress from sleeping rooms must have a minimum net clear opening of 5.7 square feet.
3. The minimum net clear opening height dimension shall be 24".  
The minimum net clear opening width dimension shall be 20".
4. The Floor To Sill Height is calculated by measuring from the clear opening sill (when unit is open) to the floor. This height cannot be more than 44" above the floor.

H3 2.0 Aluminum Clad Double Hung, Operating

Scale: 1/4" = 1'

Elevations Viewed from Exterior

ROUGH OPENING (mm)						
	3'-0" (914)	3'-2" (965)	3'-4" (1016)	3'-6" (1067)	3'-8" (1118)	3'-10" (1168)
	2'-11 1/2" (902)	3'-1 1/2" (953)	3'-3 1/2" (1003)	3'-5 1/2" (1054)	3'-7 1/2" (1105)	3'-9 1/2" (1156)
	B.U.S. (mm)					
GLASS (mm)	30 3/8" (772)	32 3/8" (822)	34 3/8" (873)	36 3/8" (924)	38 3/8" (975)	40 3/8" (1026)
5'-0" (1524)						
5'-4" (1626)						
5'-8" (1727)						
6'-0" (1829)						

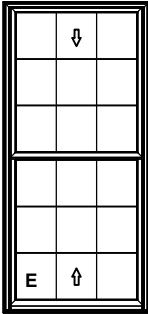
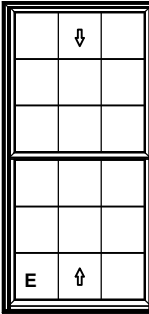
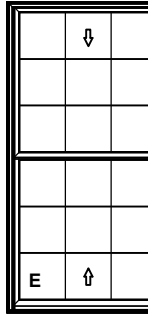
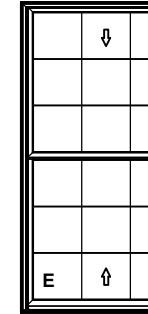
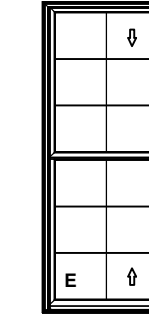
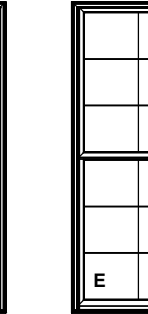
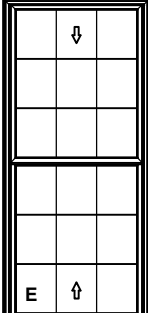
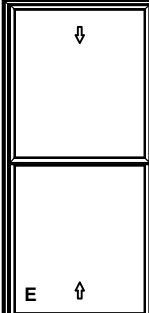
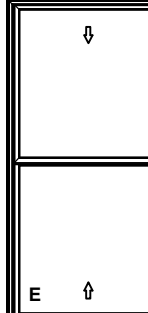
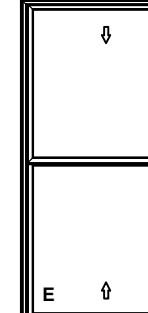
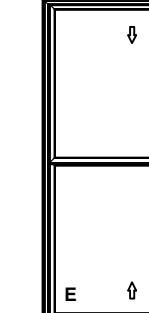
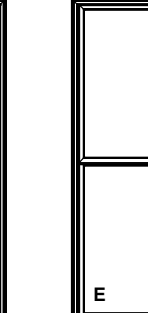
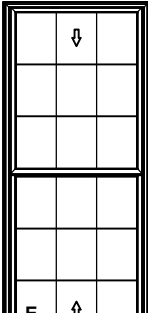
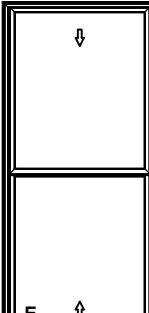

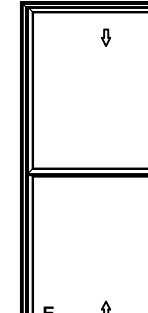
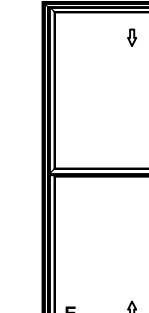
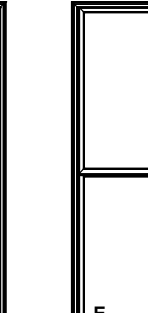
**E = Egress**  
Egress Data  
Opening specifications have been provided to assist you in determining compliance to Egress codes based on BOCA and UBC code requirements as follows.

1. The units must be operable from the inside without the use of separate tools.
2. All egress from sleeping rooms must have a minimum net clear opening of 5.7 square feet.
3. The minimum net clear opening height dimension shall be 24".  
The minimum net clear opening width dimension shall be 20".
4. The Floor To Sill Height is calculated by measuring from the clear opening sill (when unit is open) to the floor. This height cannot be more than 44" above the floor.

H3 2.0 Aluminum Clad Double Hung, Operating

Scale: 1/4" = 1'

Elevations Viewed from Exterior

ROUGH OPENING (mm)	3'-0" (914)	3'-2" (965)	3'-4" (1016)	3'-6" (1067)	3'-8" (1118)	3'-10" (1168)
	2'-11 1/2" (902)	3'-1 1/2" (953)	3'-3 1/2" (1003)	3'-5 1/2" (1054)	3'-7 1/2" (1105)	3'-9 1/2" (1156)
	30 3/8" (772)	32 3/8" (822)	34 3/8" (873)	36 3/8" (924)	38 3/8" (975)	40 3/8" (1026)
	GLASS (mm)					
6'-4" (1930)	 C-H3DH-36x76	 C-H3DH-38x76	 C-H3DH-40x76	 C-H3DH-42x76	 C-H3DH-44x76	 C-H3DH-46x76
	 C-H3DH-36x80	 C-H3DH-38x80	 C-H3DH-40x80	 C-H3DH-42x80	 C-H3DH-44x80	 C-H3DH-46x80
	 C-H3DH-36x84	 C-H3DH-38x84	 C-H3DH-40x84	 C-H3DH-42x84	 C-H3DH-44x84	 C-H3DH-46x84
6'-3 1/2" (1918)						
6'-8" (2032)						
6'-7 1/2" (2019)						
6'-11 1/2" (2121)						
7'-0" (2134)						
34 13/16" (884)						
36 13/16" (935)						
38 13/16" (986)						

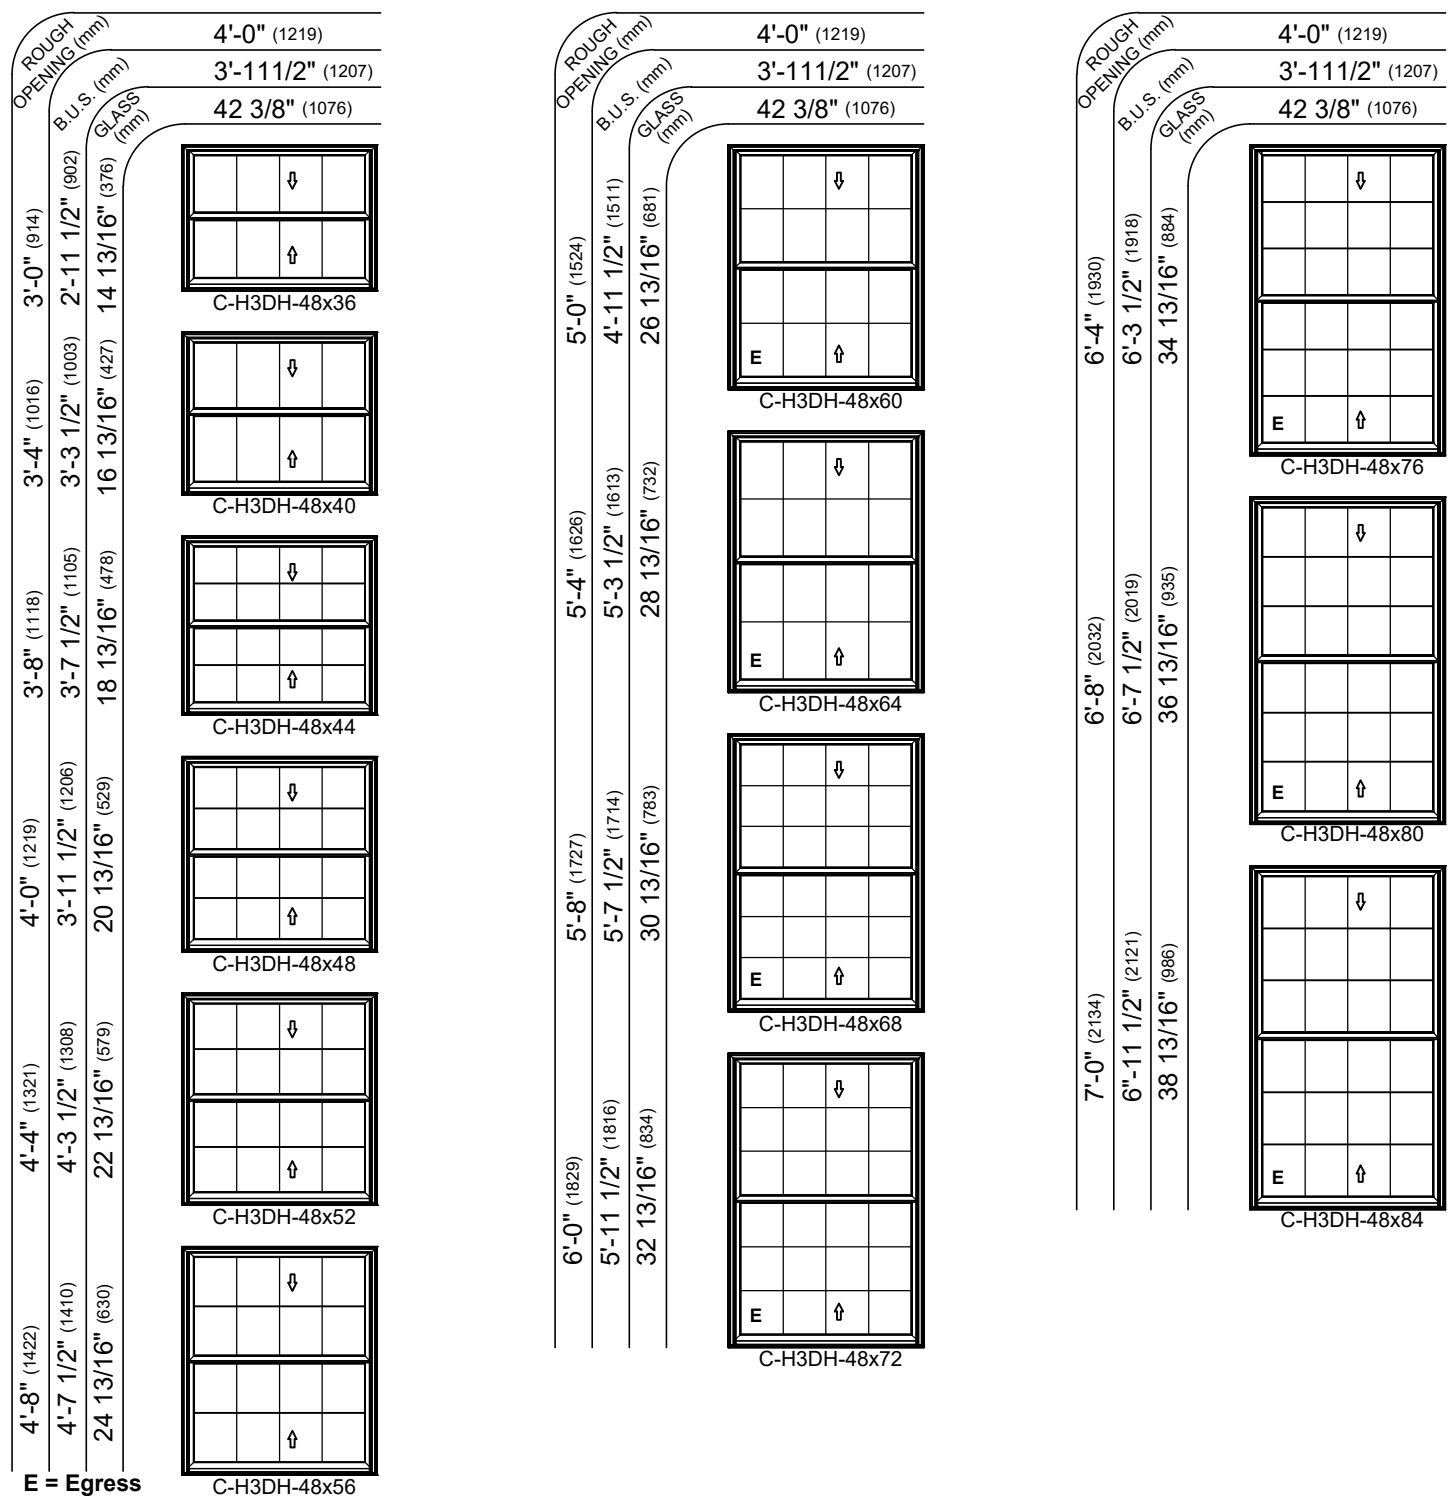
**E = Egress**  
Egress Data  
Opening specifications have been provided to assist you in determining compliance to Egress codes based on BOCA and UBC code requirements as follows.

1. The units must be operable from the inside without the use of separate tools.
2. All egress from sleeping rooms must have a minimum net clear opening of 5.7 square feet.
3. The minimum net clear opening height dimension shall be 24".  
The minimum net clear opening width dimension shall be 20".
4. The Floor To Sill Height is calculated by measuring from the clear opening sill (when unit is open) to the floor. This height cannot be more than 44" above the floor.

H3 2.0 Aluminum Clad Double Hung, Operating

Scale: 1/4" = 1'

Elevations Viewed from Exterior




H3 2.0 Aluminum Clad Double Hung, Operating


Scale: 1/4" = 1'

Elevations Viewed from Exterior

Multiple wide sizing shown as continuous head and sill (common mulls)



2-Wide			
Call Width	Rough Opening (mm)	B.U.S (mm)	Glass (mm)
18	35" (889)	34 1/2" (876)	12 3/8" (314)
22	43" (1092)	42 1/2" (1080)	16 3/8" (416)
24	47" (1194)	46 1/2" (1181)	18 3/8" (467)
26	51" (1296)	50 1/2" (1283)	20 3/8" (518)
28	55" (1397)	54 1/2" (1384)	22 3/8" (568)
30	59" (1499)	58 1/2" (1486)	24 3/8" (619)
32	63" (1600)	62 1/2" (1588)	26 3/8" (670)
34	67" (1702)	66 1/2" (1689)	28 3/8" (721)
36	71" (1804)	70 1/2" (1791)	30 3/8" (772)
38	75" (1905)	74 1/2" (1892)	32 3/8" (822)
40	79" (2007)	78 1/2" (1994)	34 3/8" (873)
42	83" (2108)	82 1/2" (2096)	36 3/8" (924)
44	87" (2210)	86 1/2" (2197)	38 3/8" (975)
46	91" (2312)	90 1/2" (2299)	40 3/8" (1026)
48	95" (2413)	94 1/2" (2400)	42 3/8" (1076)

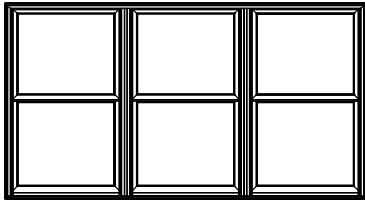


3-Wide			
Call Width	Rough Opening (mm)	B.U.S (mm)	Glass (mm)
18	52" (1321)	51 1/2" (1308)	12 3/8" (314)
22	64" (1626)	63 1/2" (1613)	16 3/8" (416)
24	70" (1778)	69 1/2" (1765)	18 3/8" (467)
26	76" (1931)	75 1/2" (1918)	20 3/8" (518)
28	82" (2083)	81 1/2" (2070)	22 3/8" (568)
30	88" (2235)	87 1/2" (2223)	24 3/8" (619)
32	94" (2388)	93 1/2" (2375)	26 3/8" (670)
34	100" (2540)	99 1/2" (2527)	28 3/8" (721)
36	106" (2693)	105 1/2" (2680)	30 3/8" (772)
38	112" (2845)	111 1/2" (2832)	32 3/8" (822)
40	118" (2997)	117 1/2" (2985)	34 3/8" (873)

Maximum frame width for multiple wide units using a continuous head and sill is 120".


Formulas for Calculating Overall Widths for Box Mulls:

Frame Width for Tight Box Mulls (Frame to Frame)  
Overall Frame Width = Add B.U.S. Width of each unit in combination

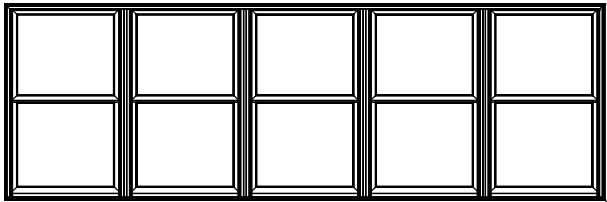Rough Opening for Tight Box Mulls (Frame to Frame)  
R.O. Width = Overall Frame Width + 1/2"



5-Wide			
Call Width	Rough Opening (mm)	B.U.S (mm)	Glass (mm)
18	86" (2185)	85 1/2" (2172)	12 3/8" (314)
22	106" (2693)	105 1/2" (2680)	16 3/8" (416)
24	116" (2947)	115 1/2" (2934)	18 3/8" (467)

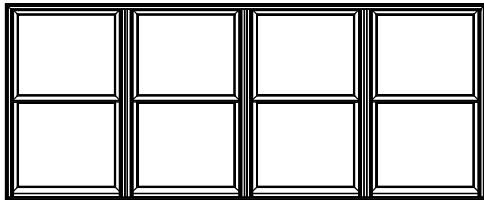

4-Wide			
Call Width	Rough Opening (mm)	B.U.S (mm)	Glass (mm)
18	69" (1753)	68 1/2" (1740)	12 3/8" (314)
22	85" (2159)	84 1/2" (2146)	16 3/8" (416)
24	93" (2362)	92 1/2" (2350)	18 3/8" (467)
26	101" (2566)	100 1/2" (2553)	20 3/8" (518)
28	109" (2769)	108 1/2" (2756)	22 3/8" (568)
30	117" (2972)	116 1/2" (2959)	24 3/8" (619)

Type or print the following:

Applicant name:

Mailing address:

City:

State:

Zip code:

Date:

Daytime phone #:

Email address:

Applicant signature:

*Mike Hayward*

Minor work (staff review) – one copy

Major work (COA committee review) – ten  
copies

Additions > 25% of building sq. footage

New buildings

Demolition of building or structure

All other

Post approval re-review of conditions of  
approval

**Office Use Only**

Transaction #: \_\_\_\_\_

File #: COA-0160-2019

Fee: \_\_\_\_\_

Amount paid: \_\_\_\_\_

Received date: \_\_\_\_\_

Received by:

\_\_\_\_\_

Property street address:

A

Historic district:

Historic property/Landmark name (if applicable):

Owner name:

Owner mailing address:

**For applications that require review by the COA Committee (major work), provide addressed and stamped envelopes for owners for all properties with 100 feet on all sides of the property, as well as the property owner.**

Property Owner Name & Address

Property Owner Name & Address


**I understand that all major work applications that require review by the Raleigh Historic Development Commission's COA Committee must be submitted by 4 p.m. on the date of the application deadline; otherwise, consideration will be delayed until the following committee meeting. An incomplete application will not be accepted.**

Will you be applying for rehabilitation tax credits for this project? Yes      No  Did you consult with staff prior to filing the application? Yes      No	<b>Office Use Only</b>  Type of work: _____ _____
--	--

Design Guidelines: please cite the applicable sections of the design guidelines ( <a href="http://www.rhdc.org">www.rhdc.org</a> ).		
Section/Page	Topic	Brief description of work (attach additional sheets as needed).

<p align="center"><b>Minor Work Approval (office use only)</b></p> <p>Upon being signed and dated below by the Planning Director or designee, this application becomes the Minor Work Certificate of Appropriateness. It is valid until _____.</p> <p>Please post the enclosed placard form of the certificate as indicated at the bottom of the card. Issuance of a Minor Work Certificate shall not relieve the applicant, contractor, tenant, or property owner from obtaining any other permit required by City Code or any law. Minor Works are subject to an appeals period of 30 days from the date of approval.</p> <p>Signature (City of Raleigh) _____ Date _____</p>
---

12/2/19

## **COA for construction of three houses in Historic Oakwood**

### **SUMMARY**

We seek approval for the construction of three homes at 501 E Lane St. We have already been unanimously approved by RHDC to subdivide this property into three lots, and Raleigh City Council will vote to approve the three-lot subdivision on 12/3/19. The attached drawings were designed by KDK Design, and they have already had experience doing similar projects in Raleigh historic districts, including Historic Oakwood.

SPEED  
LIMIT  
25

GRAYSON  
homes  
919-578-6222



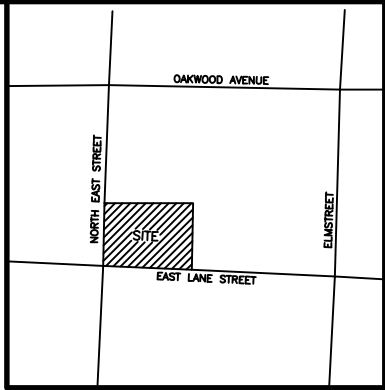
STOP



SURVEY FOR  
**GRAYSON HOMES**

LOT 1 OF 501 EAST LANE STREET  
D.B. 17244, PAGE 1085  
CITY OF RALEIGH  
WAKE COUNTY, NORTH CAROLINA

DECEMBER 30, 2019




VICINITY MAP

20 10 0 20 40

SCALE 1"=20'

N/F  
WILLIAM D. BECOM  
& TERESA BECOM  
D.B. 8669, PAGE 2418  
PIN# 1704.20-90-2510

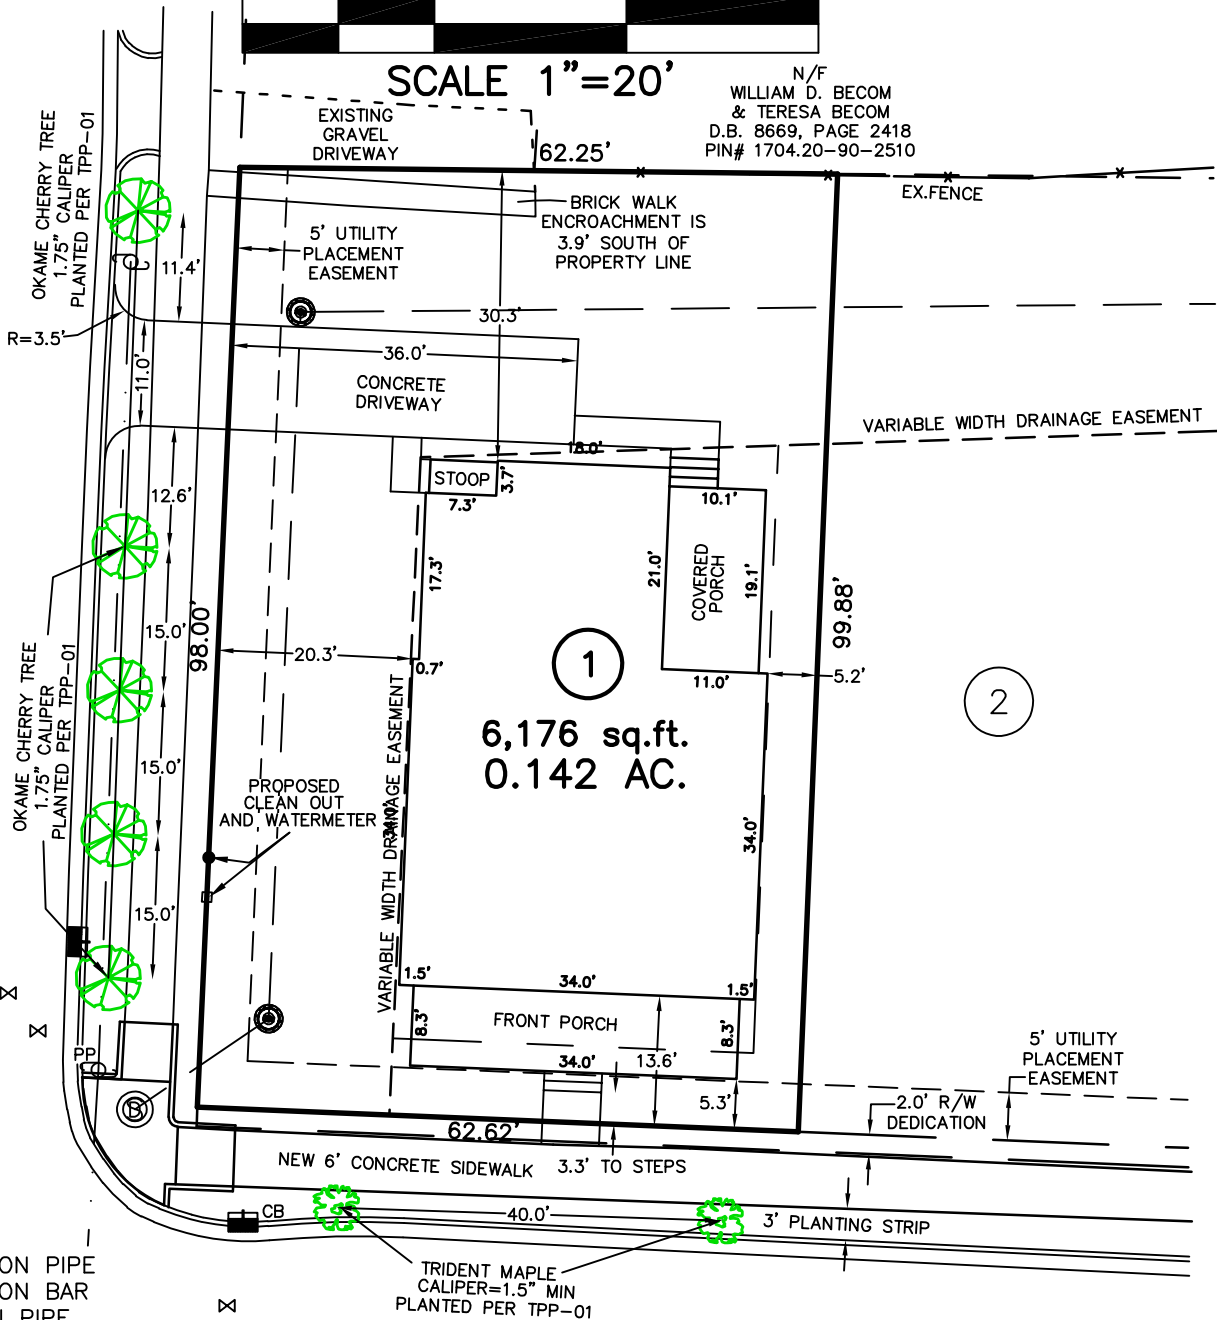NORTH EAST STREET VAIRABLE WIDTH R/W




**LEGEND:**

- EIP - EXISTING IRON PIPE
- EIB - EXISTING IRON BAR
- BEIP - BENT IRON PIPE
- BEIB - BENT IRON BAR
- CM - CONCRETE MONUMENT
- EPK - EXISTING PK NAIL
- SPK - SET PK NAIL
- NIP - NEW IRON PIPE SET
- R/W - RIGHT OF WAY
- CATV - CABLE TV BOX
- EB - ELECTRIC BOX
- TEL - TELEPHONE PEDESTAL
- PP - POWER POLE
- OHL - OVERHEAD LINE
- LP - LIGHT POLE
- WM - WATER METER
- WV - WATER VALVE
- CO - SEWER CLEAN-OUT

EAST LANE STREET VAIRABLE WIDTH R/W

**IMPERVIOUS SURFACE TABLE**

FRONT PORCH	283 S.F.
HOUSE	1,763 S.F.
COVERED PORCH	192 S.F.
STOOP	25 S.F.
DRIVEWAY	396 S.F.
SIDEWALKS	118 S.F.
MISC/UTILITIES	124 S.F.
TOTAL IMPERVIOUS AREA	2,901 S.F.
TOTAL LOT AREA	6,176 S.F.
PERCENTAGE OF IMPERVIOUS AREA	46.97%



**CMP**

CAWTHORNE, MOSS  
& PANCIERA, P.C.

Professional Land Surveyors  
C-1525

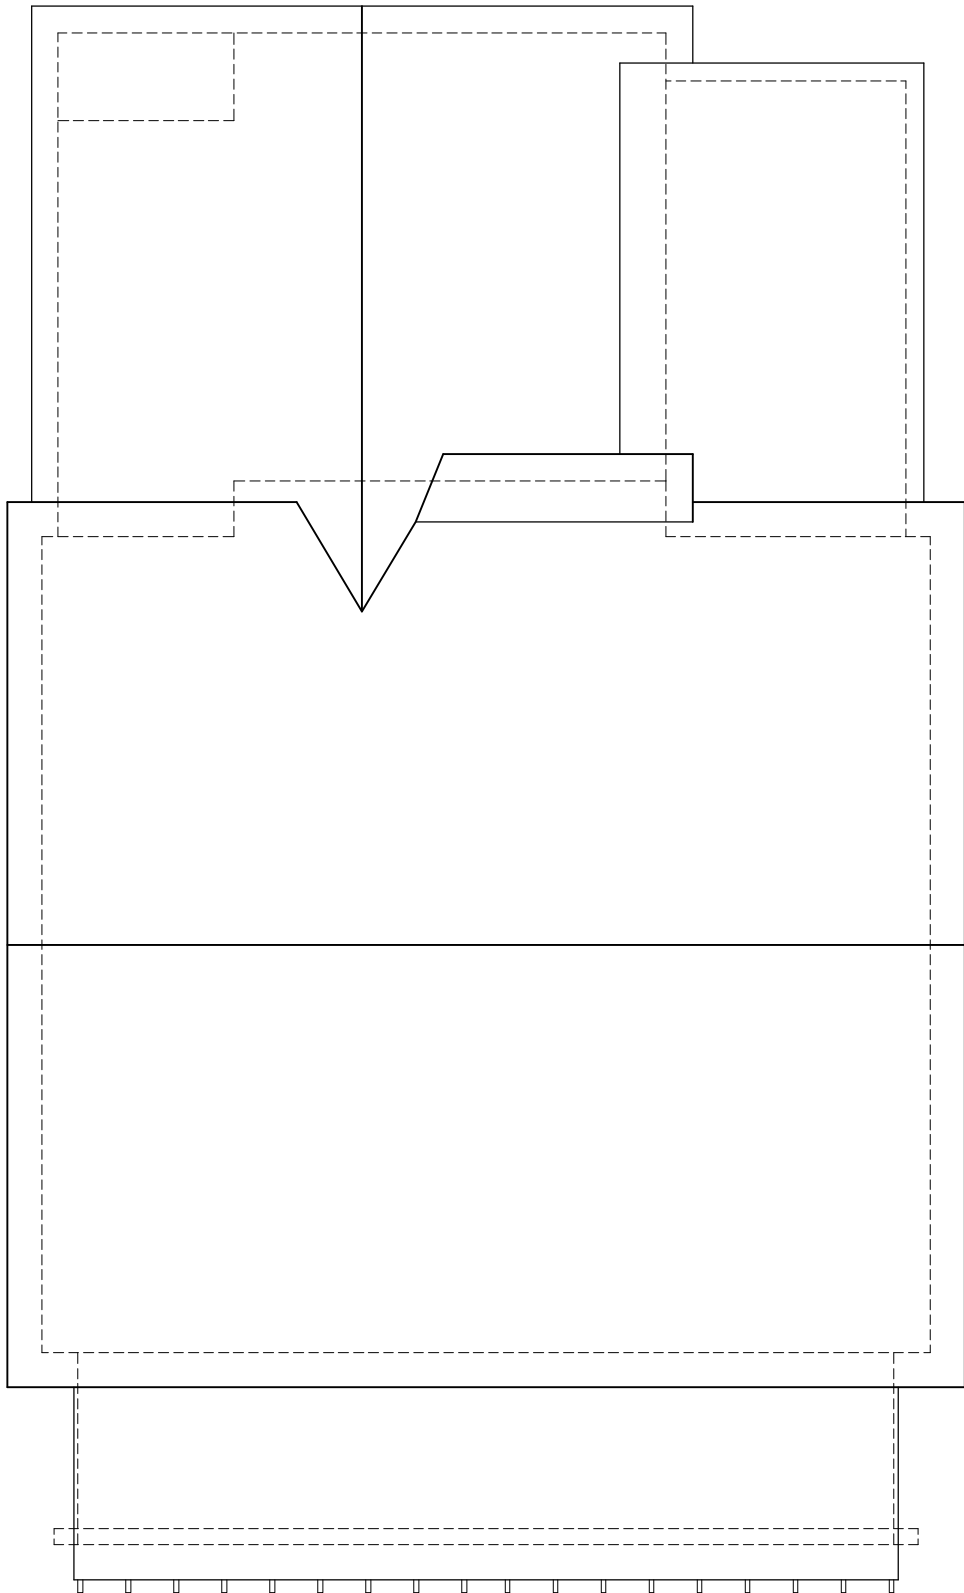
333 S. White Street  
Post Office Box 1253  
Wake Forest, N.C. 27588  
(919)556-3148

I DECLARE THAT THIS SURVEY COMPLIES WITH THE NORTH CAROLINA STANDARDS OF PRACTICE FOR SURVEYING, (SECTION 1600) FOR CLASS A SURVEYS AND THAT THE CALCULATED RATIO OF PRECISION BEFORE ADJUSTMENTS IS 1:10,000+. FURTHERMORE, PROPERTY CORNERS SHOWN ARE PRIMARY CONTROL MONUMENTATION FOR THE RE-ESTABLISHMENT OF PROPERTY CORNERS IN THE ABSENCE OF GRID MONUMENTS AND OTHER SUBDIVISION PROPERTY CORNERS. THIS SURVEY IS NOT TO BE RECORDED WITHOUT THE WRITTEN AUTHORIZATION OF THE SURVEYOR.

**PRELIMINARY**


FOR REVIEW PURPOSES ONLY

PROFESSIONAL LAND SURVEYOR L-




Roof Plan

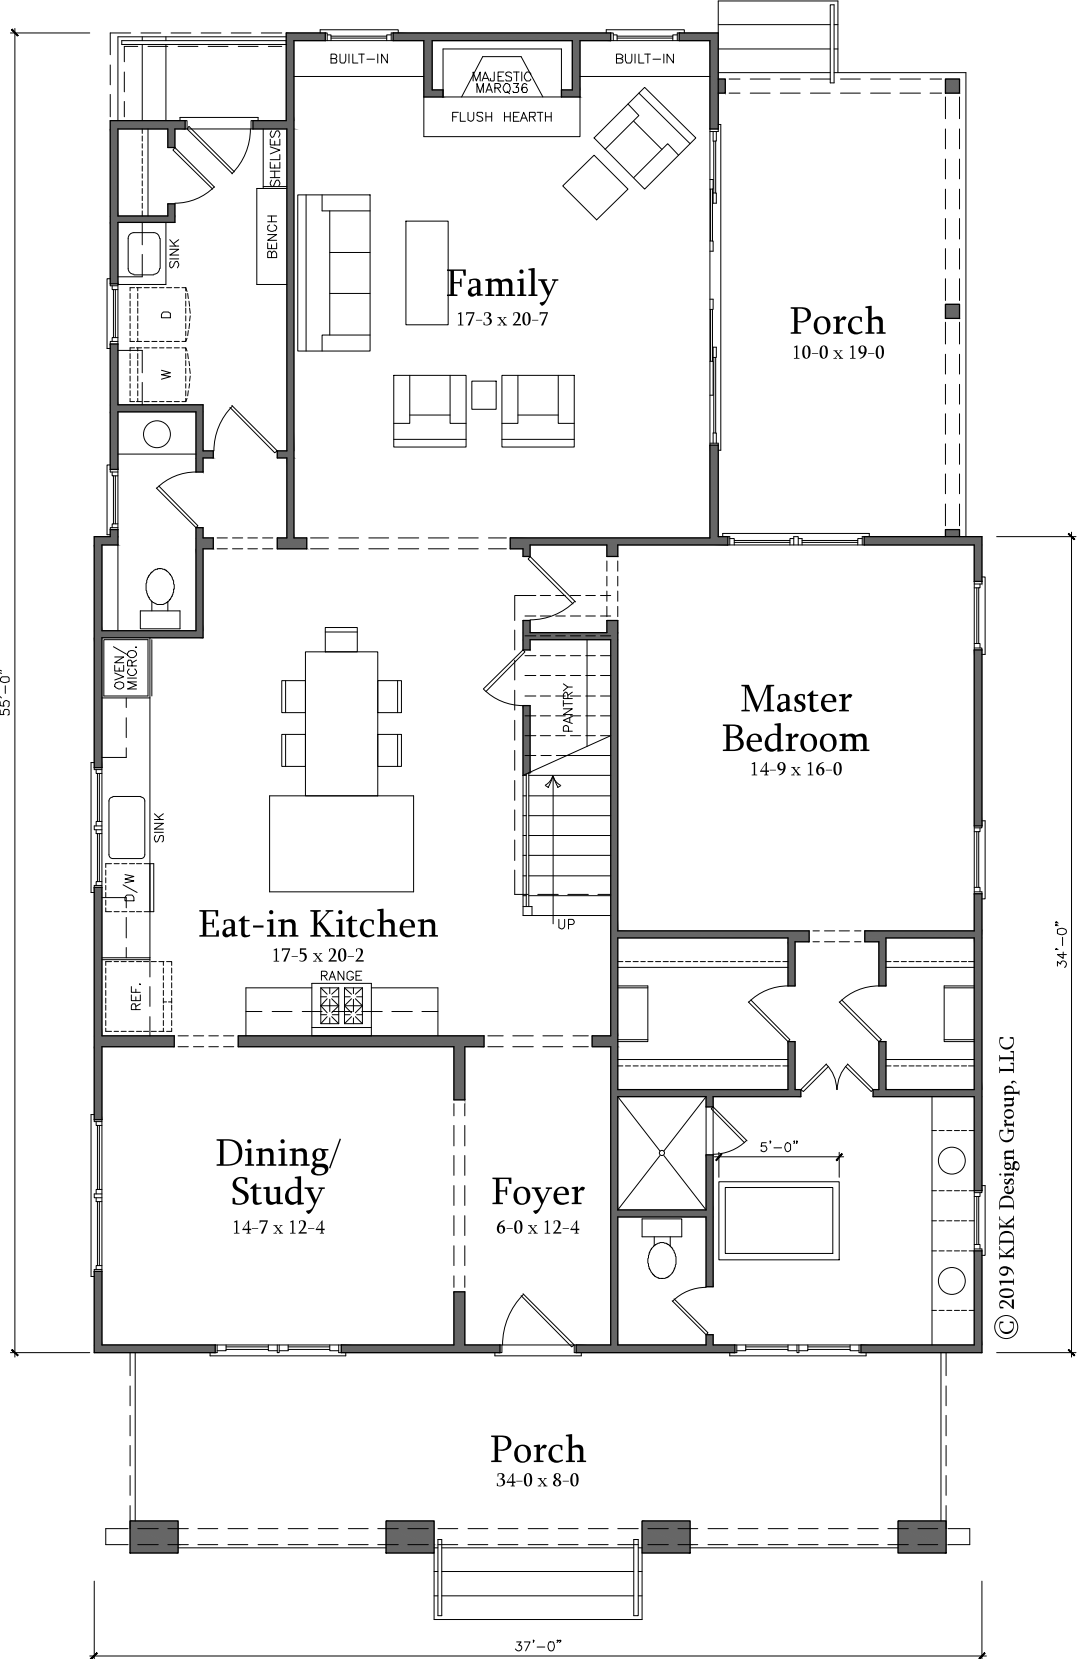1/8" = 1'-0"



First Floor Plan

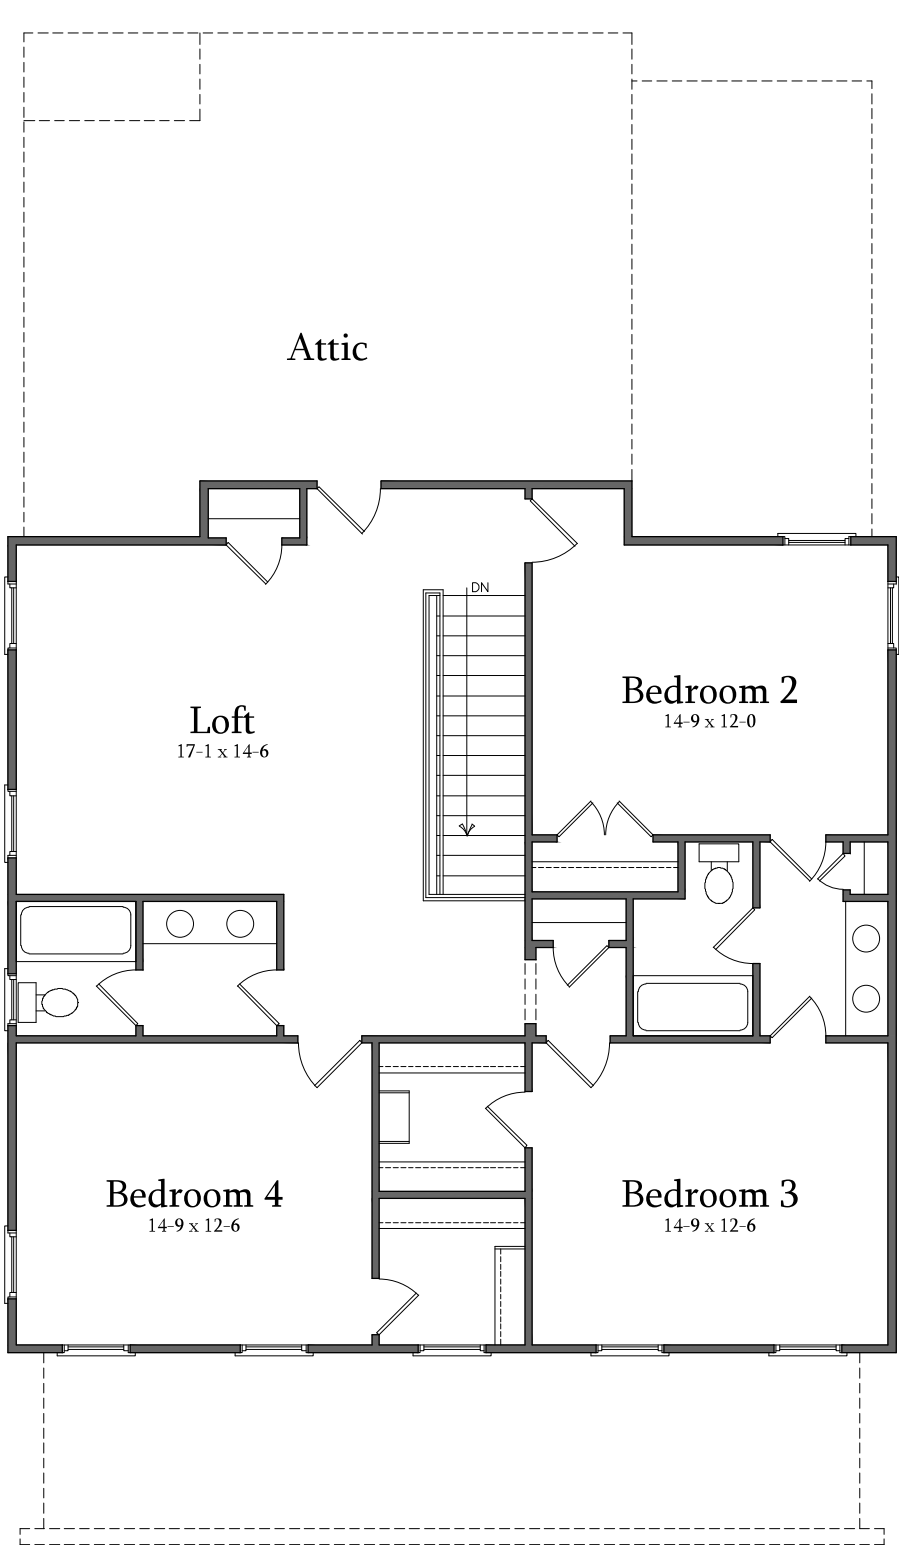1/8" = 1'-0"



Second Floor Plan

1/8" = 1'-0"

SQUARE FOOTAGE	
OUTSIDE FACE OF SHEATHING	
1763 S.F.	FIRST FLOOR CONDITIONED
1300 S.F.	SECOND FLOOR CONDITIONED
3063 S.F.	TOTAL CONDITIONED
272 S.F.	FRONT PORCH
190 S.F.	REAR PORCH
27 S.F.	SIDE PORCH

KDK Design Group, LLC  
833 Woodburn Road  
Raleigh, North Carolina 27605  
919.301.8643  
kdkdesigngroup.com

Grayson Homes  
501 E. Lane Street - Raleigh, North Carolina

Lot 1



kdkdesign




**Rear Elevation**

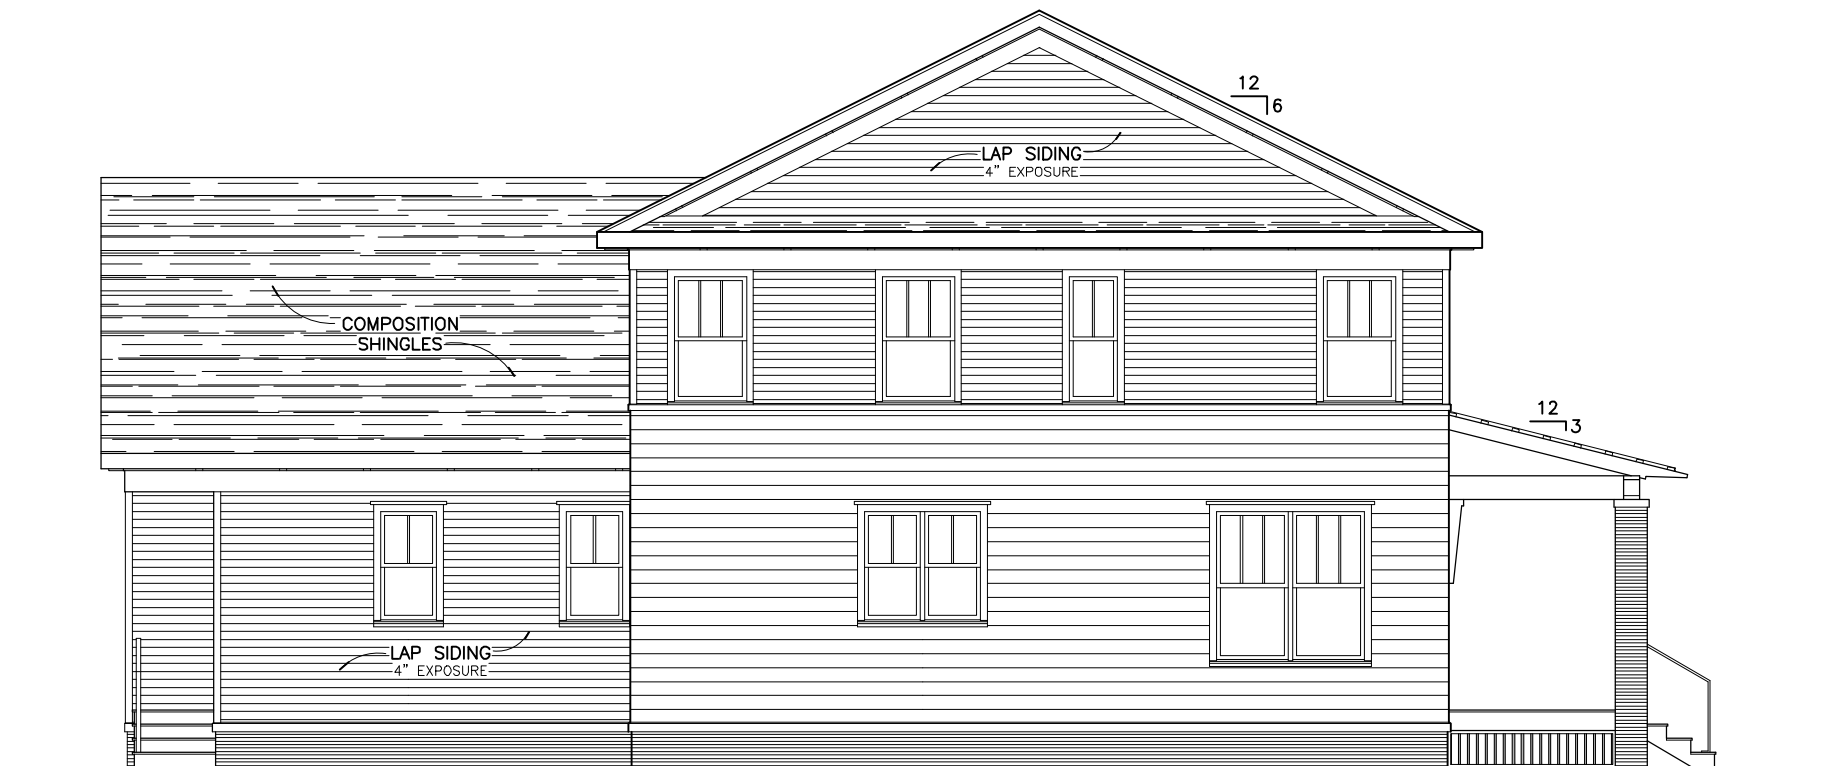1/8" = 1'-0"



**Right Side Elevation**

1/8" = 1'-0"



**Left Side Elevation**

1/8" = 1'-0"

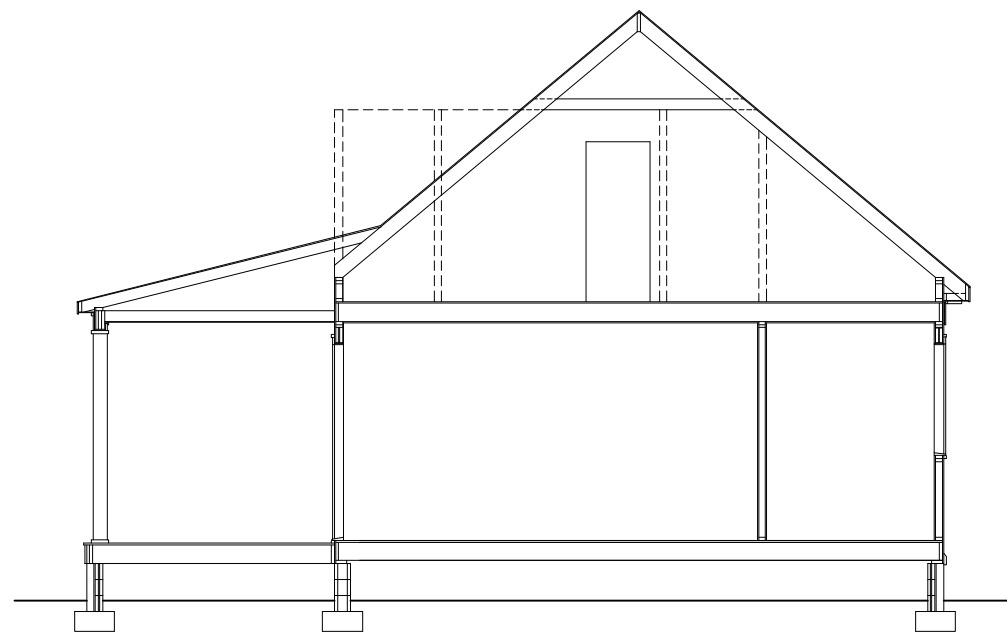


**Front Elevation**

1/8" = 1'-0"


© 2019 KDK Design Group, LLC





① Building Section  
1/8" = 1'-0"

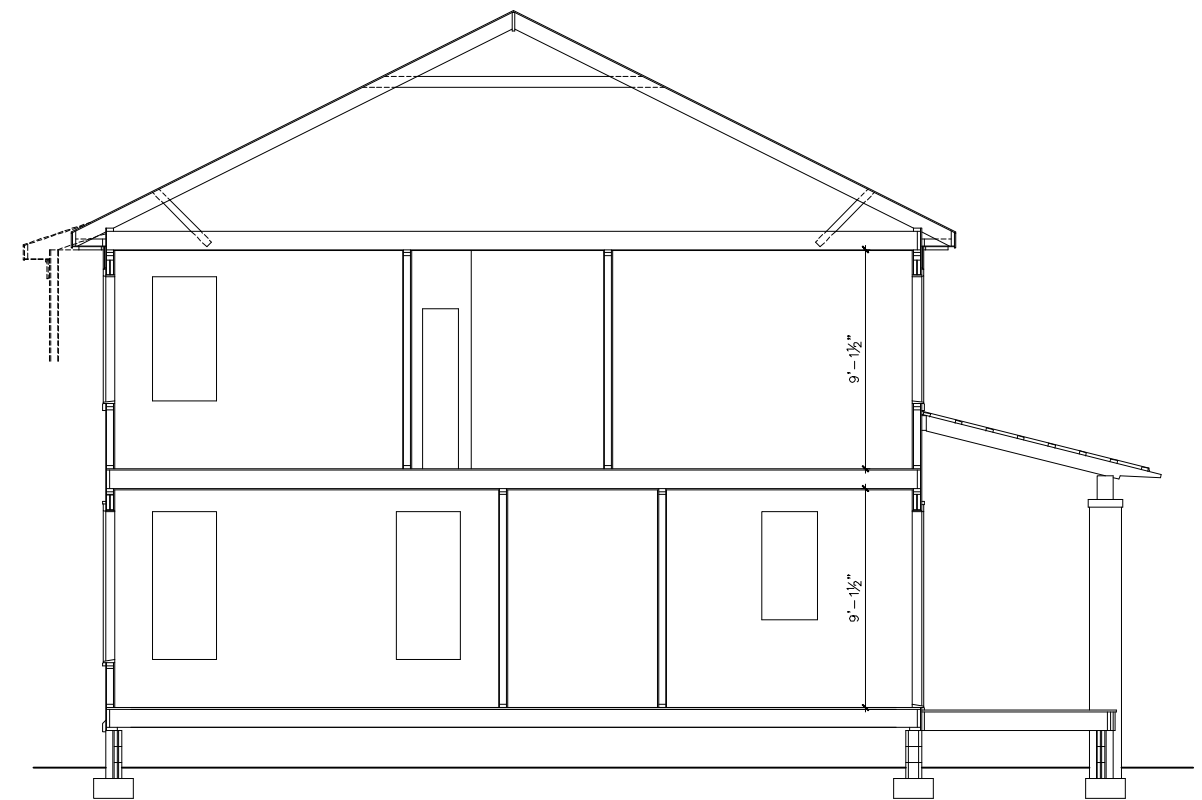at Family



② Building Section  
1/8" = 1'-0"

at Main House












Address	Area Sq.ft	Built Area	Built Mass	BA%	BM%
301 N. East St	5,332	1,450	1,282	27.2	24.0
308 N. East St	5,728	1,967	1,556	34.3	27.2
513 E. Lane St	4,771	1,578	1,328	33.1	27.8
517 E. Lane St	4,948	2,396	1,552	48.4	31.4
519 E. Lane St	5,967	3,698	2,141	62.0	35.9
523 E. Lane St	6,804	4,254	2,424	62.5	35.6
525 E. Lane St	7,233	2,461	1,714	34.0	23.7
Lot 1	6,176	2,901	2,263	47.0	36.6
Lot 2	5,177	2,273	1,831	43.9	35.4
Lot 3	5,301	2,258	1,817	42.6	34.3

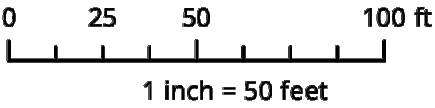BUILT AREA AND BUILT MASS COMPARISON  
FOR GRAYSON HOMES



**Disclaimer**  
IMaps makes every effort to produce and publish the most current and accurate information possible. However, the maps are produced for information purposes, and are **NOT** surveys. No warranties, expressed or implied, are provided for the data therein, its use, or its interpretation.