


MAINTENANCE:
REPAIR/REPLACE BAFFLES WHEN THEY COLLAPSE, TEAR OR DECOMPOSE.
REMOVE SEDIMENT WHEN CELL IS 1/2 FULL.


PERSPECTIVE VIEW

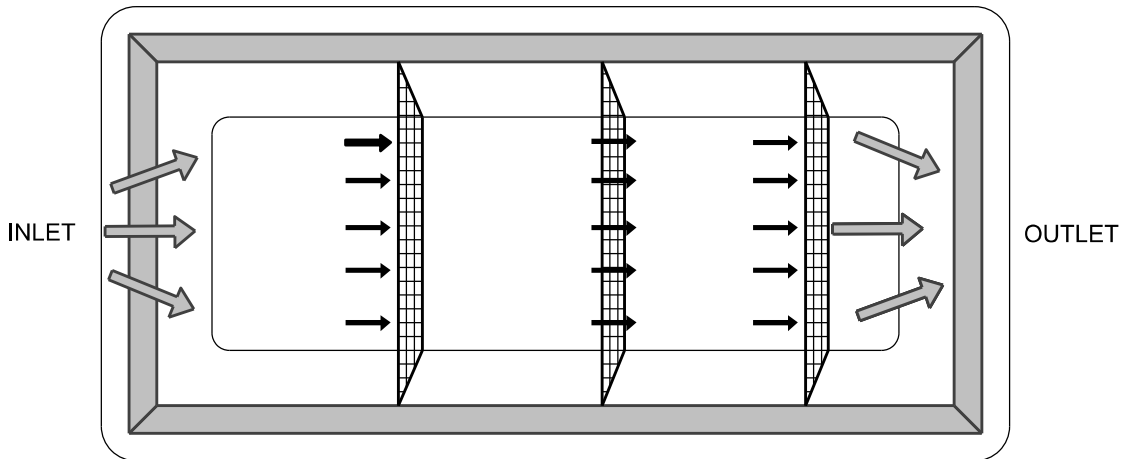

NOTES:

1. 3 BAFFLES (MIN) BETWEEN INLET & OUTLET.
2. SEE N.C. DEQ EROSION AND SEDIMENT CONTROL PLANNING AND DESIGN MANUAL FOR CONDITIONS WHERE PRACTICE APPLIES; PLANNING CONSIDERATION & DESIGN CRITERIA.
3. LOCATE SEDIMENT INFLOW TO THE BASIN AWAY FROM THE DAM TO PREVENT SHORT CIRCUITS FROM INLETS TO OUTLETS
4. AT A MINIMUM, SEED, STRAW & TACK APPLICATION REQUIRED FOR SITE INSPECTION APPROVAL
5. TRAPS MUST BE STABILIZED IMMEDIATELY UPON CONSTRUCTION AND PRIOR TO SITE INSPECTION APPROVAL

TOP VIEW

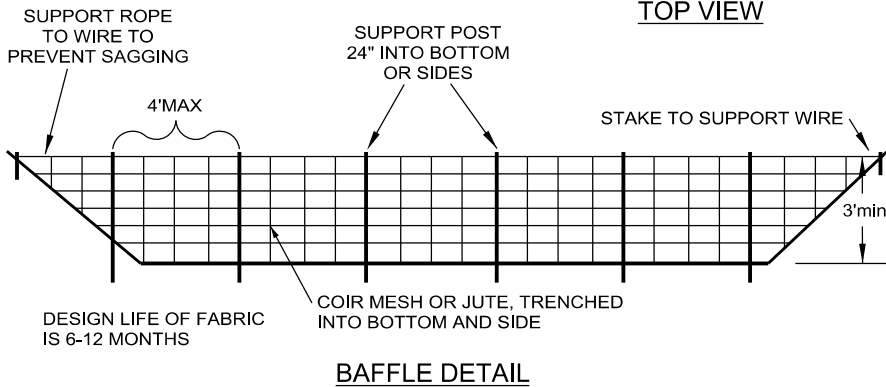

**CITY OF RALEIGH
STANDARD DETAIL**

REVISIONS DATE: 8/2020 NOT TO SCALE

TEMPORARY SEDIMENT TRAP

SW-20.05.1