


CROSS SECTION VIEW

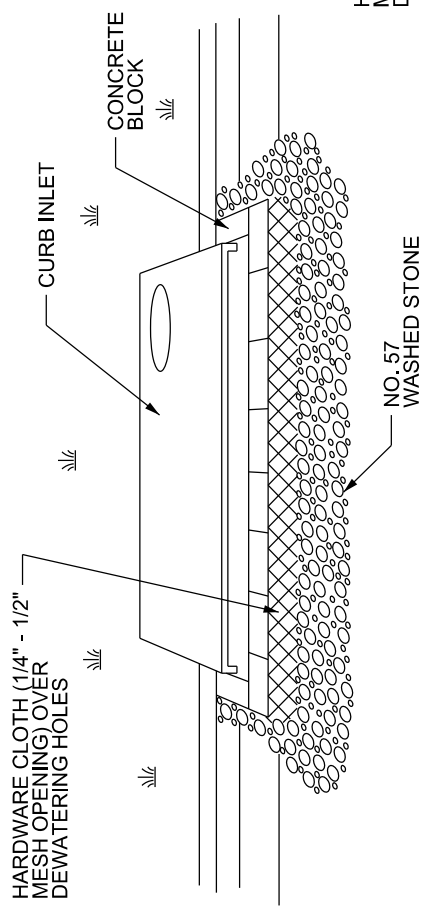

PERSPECTIVE VIEW

NOTES:

1. TWO CONCRETE BLOCKS SHALL BE PLACED ON THEIR SIDES ABUTTING THE CURB AT EITHER SIDE OF THE INLET OPENING, A 2" X 4" STUD SHALL BE CUT AND PLACED THROUGH THE OUTER HOLES OF THE SPACER BLOCKS TO BRACE THE FRONT BLOCKS. FRONT BLOCKS ARE PLACED ON THEIR SIDES ACROSS THE INLET AND ABUTTING THE SPACER BLOCKS.
2. WIRE MESH OR HARDWARE CLOTH WITH 1/4" - 1/2" OPENINGS SHALL BE PLACED OVER THE OUTSIDE VERTICAL FACE (WEBBING) OF THE BLOCKS, TO PREVENT STONE FROM BEING WASHED THROUGH THE HOLES IN THE BLOCKS.
3. STONE SHALL BE PILED AGAINST THE WIRE TO THE TOP OF THE BLOCK. (NO. 57 WASHED STONE)
4. CHECK DEVICE AFTER EACH RAIN AND REPLACE WASHED STONE IF IT CLOGS WITH SEDIMENT.

CITY OF RALEIGH		
STANDARD DETAIL		
REVISIONS	DATE: 8/2020	NOT TO SCALE
	BLOCK AND GRAVEL INLET PROTECTION FOR CURB INLET	
SW-20.26		