



ALTERNATIVE 1:

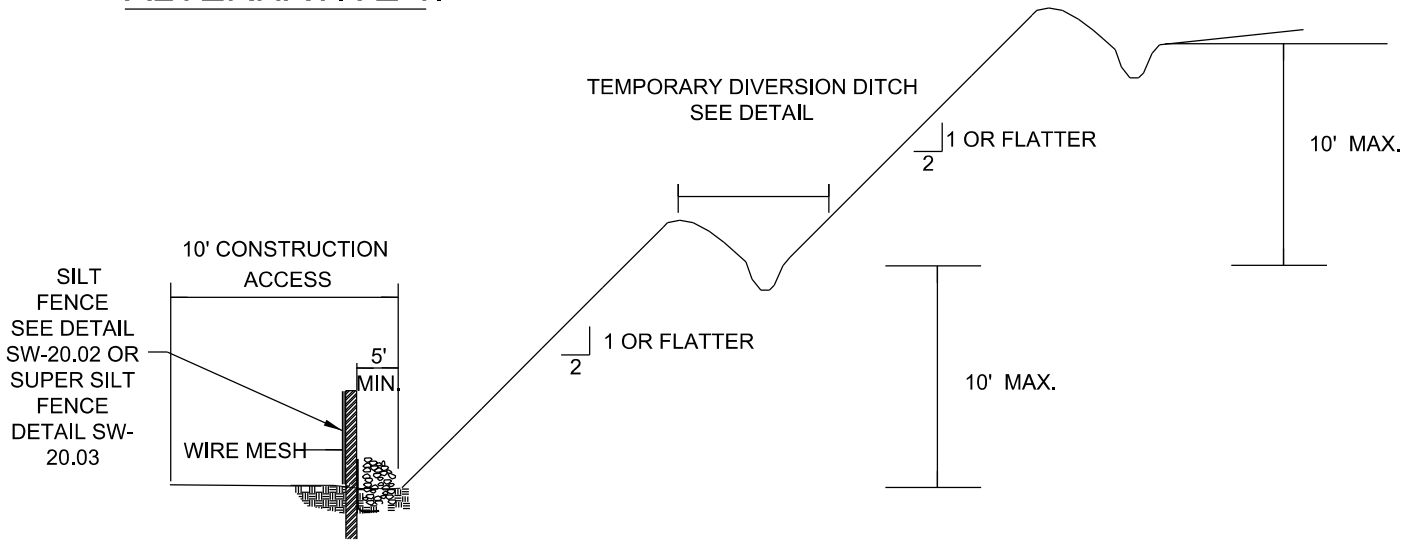

ALTERNATIVE 2:

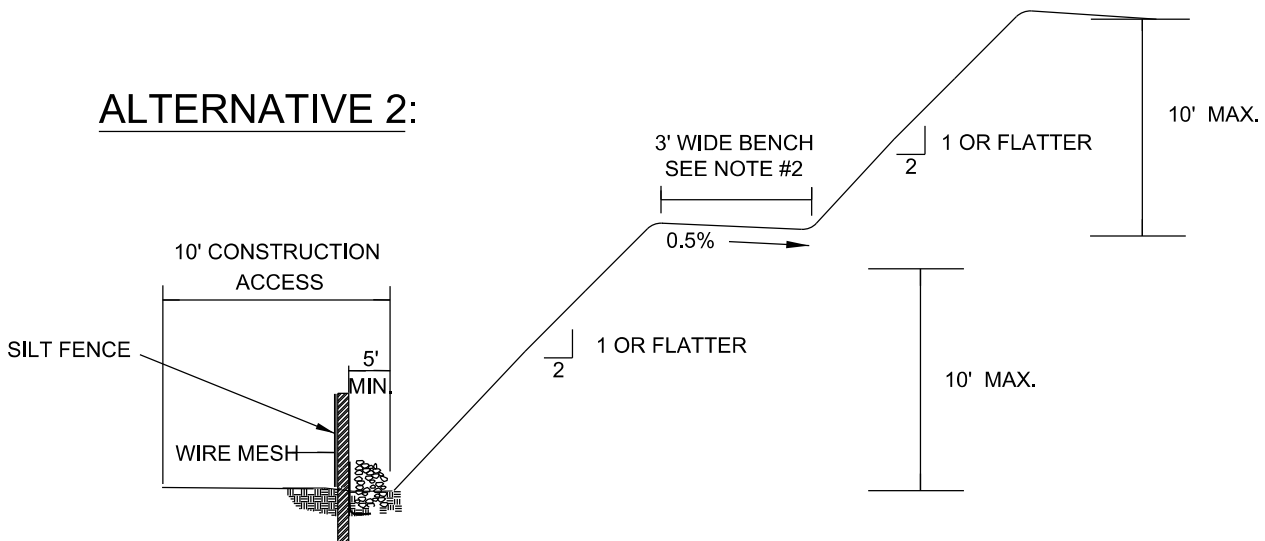

INSTALLATION NOTES:

1. IF DIVERSION DITCH USED, IT SHOULD FLOW INTO SEDIMENT BASIN, ROCK CHECK DAM, OR SLOPE DRAIN.
2. BENCH SHOULD BE GRADED AT 0% LONGITUDINAL SLOPE (ON-CONTOUR).
3. SLOPES SHOULD BE STABILIZED IMMEDIATELY AFTER GRADING IS COMPLETE.

MAINTENANCE NOTES:

1. MEASURES SHALL BE INSPECTED AT LEAST ONCE A WEEK OR IMMEDIATELY AFTER EACH RAINFALL OF 1.0 INCH OR GREATER. MAKE ANY REQUIRED REPAIRS IMMEDIATELY.
2. IF SIGNS OF EROSION ARE EVIDENT, REGRADE AND RESTABILIZE. CONSIDER USING MATTING OR OTHER MEASURES TO HELP PREVENT EROSION.

CITY OF RALEIGH STANDARD DETAIL

REVISIONS DATE: 9/2024 NOT TO SCALE

SLOPE TERRACING

SW-20.28