


CONCRETE DEPTH	
RAMP / FLARE	6"
LANDING	4"

NOTE: * USE SMALL FLARE ONLY WHEN A CURB WOULD DIRECTLY CONFLICT WITH APPROACHING VEHICLE TURNING MOVEMENTS.

TYPE N-3

- ① 8.33% (12:1) MAX RAMP SLOPE
- ② CROSS SLOPE: 2.00%
- ③ CURB RAMPS REQUIRE A (4'-0") MINIMUM LANDING WITH A MAXIMUM CROSS SLOPE AND LONGITUDINAL SLOPE OF 2.00% WHERE PEDESTRIANS PERFORM TURNING MANEUVERS. PEDESTRIANS DRAIN TO CURB.
- ④ RAMPS AND DOMES SHALL BE INSTALLED THE SAME WIDTH AS THE SIDEWALK.

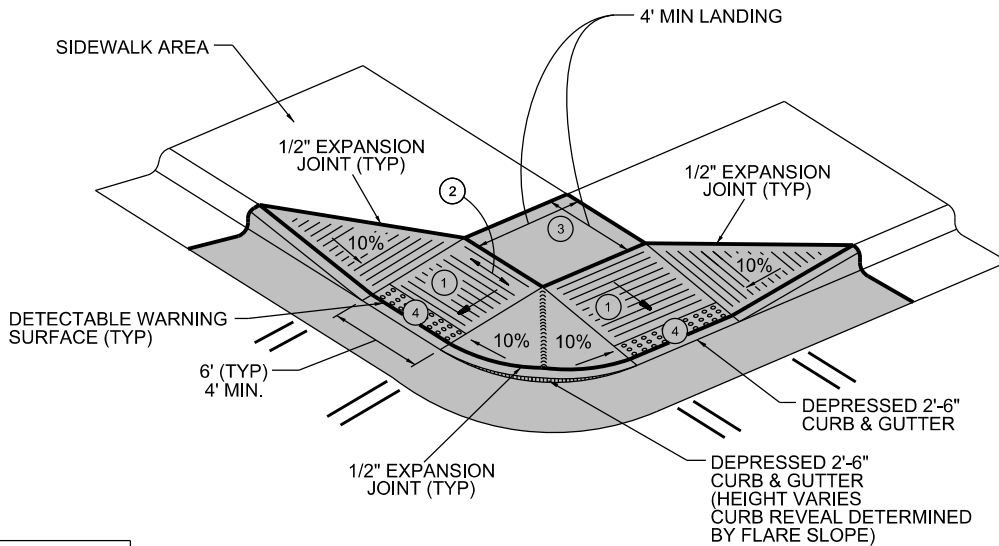

CONCRETE DEPTH	
RAMP / FLARE	6"
LANDING	4"

TYPE N-3A (COMMERCIAL/RETAIL USE)

CITY OF RALEIGH STANDARD DETAIL		
REVISIONS	DATE: 8/2020	NOT TO SCALE
CURB RAMPS (NEW DEVELOPMENT)		
T-20.01.3		