


**TYPICAL BENCH LAYOUT  
WITH EXISTING SIDEWALK**  
NTS

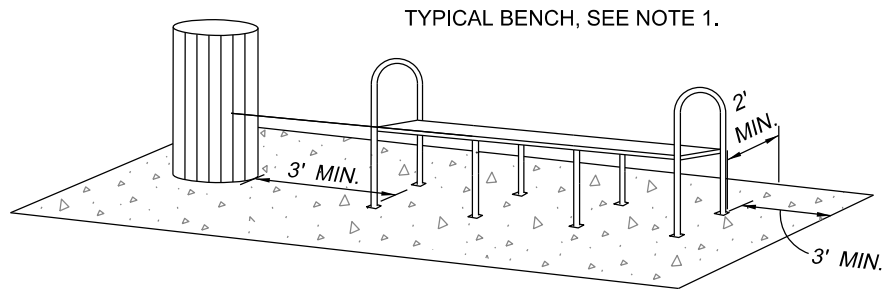

**BENCH SCHEMATIC**

**NOTES:**

1. BENCH STYLE SUBJECT TO CHANGE, COORDINATE WITH CITY.
2. BENCH SHOULD BE A MINIMUM OF 3' FROM THE SIDE OF THE CONCRETE PAD AND 2' FROM THE BACK EDGE OF THE CONCRETE PAD. COORDINATE LOCATION WITH THE CITY.
3. IF NO SIDEWALK CURRENTLY EXISTS, PROVIDE SIDEWALK TO NEAREST ADA ACCESSIBLE INTERSECTION OR DRIVEWAY WITH APPROPRIATE RAMPS.
4. FIXED OBJECTS SHALL BE PLACED OUTSIDE OF THE CLEAR ZONE.

<b>CITY OF RALEIGH STANDARD DETAIL</b>		
REVISIONS	DATE: 8/2020	NOT TO SCALE
DATE: 12/2022	<b>SITE LAYOUT FOR BENCH</b>	
<b>TT-05</b>		