Rezoning Application and Checklist



Planning and Development Customer Service Center • One Exchange Plaza, Suite 400 | Raleigh, NC 27601 | 919-996-2500

Please complete all sections of the form and upload via the Permit and Development Portal (permitportal.raleighnc.gov). Please see page 8 for information about who may submit a rezoning application. A rezoning application will not be considered complete until all required submittal components listed on the Rezoning Checklist have been received and approved. For questions email rezoning@raleighnc.gov.

Rezoning Request

		•	, , , , , , ,			
Rezoning	Genera	al Use Cond	ditional Use	Master Plan	Office Use Only Rezoning case #	
Type	Text ch	nange to zoning co	nditions			
Existing zoning base d	istrict: IX	Height: 12	Fronta	age:	Overlay(s):	
Proposed zoning base	district: DX	Height: 30	Fronta	age: UG	Overlay(s):	
Helpful Tip: View the 2 layers.	Zoning Map to se	arch for the addres	ss to be rezoned	d, then turn on the 'Z	oning' and 'Overlay'	
If the property has bee	n previously rezo	ned, provide the re	zoning case nu	ımber:		
		General lı	nformation			
Date:	Date a	amended (1):		Date amended (2	2):	
Property address: See	Attachment A					
Property PIN: See Atta	chment A					
Deed reference (book/	Deed reference (book/page): See Attachment A					
Nearest intersection: S	ee Attachment A		Property size	(acres):		
For planned deve	· -	Fotal units:		Total square f	Total square footage:	
applications only		Total parcels:		Total buildings	Total buildings:	
Property owner name and address: Raleigh Development Company II, LLC, 333 Fayetteville Street, Suite 100, Raleigh NC 2760					uite 100, Raleigh NC 27601	
Property owner email: ccarter@rdc.bz						
Property owner phone:						
Applicant name and address: Raleigh Development Company II, LLC, 333 Fayetteville Street, Suite 100, Raleigh NC 27601						
Applicant email: mpaul@morningstarlawgroup.com						
Applicant phone: 919-590-03900 by:						
Applicant signature(s): Unit (artur						
Additional email(s):						

RECEIVED

By Sarah Shaughnessy at 8:46 am, Jun 15, 2022

Page **1** of **11** REVISION 05.05.21

	ATTACHMENT A							
PIN	Street Address	Nearest Intersection	Acreage	Book/Page No	Current	Proposed	Owner Name	Owner Address
PIN					Zoning	Zoning		
1704523204	424 WEST PEACE STREET	WEST PEACE STREET AND NORTH WEST STREET	0.24	16727/00334	IX-12	DX-30-UG	RALEIGH DEVELOPMENT COMPANY II, LLC	333 FAYETTEVILLE STREET, SUITE 100, RALEIGH NC 27601
1704524340	418 WEST PEACE STREET	WEST PEACE STREET AND NORTH WEST STREET	0.65	018940/01643	IX-12	DX-30-UG	RALEIGH DEVELOPMENT COMPANY II, LLC	333 FAYETTEVILLE STREET, SUITE 100, RALEIGH NC 27601
1704523300	708 NORTH WEST STREET	WEST PEACE STREET AND NORTH WEST STREET	0.08	16727/00334	IX-12	DX-30-UG	RALEIGH DEVELOPMENT COMPANY II, LLC	333 FAYETTEVILLE STREET, SUITE 100, RALEIGH NC 27601
1704523326	714 NORTH WEST STREET	WEST PEACE STREET AND NORTH WEST STREET	0.21	16727/00334	IX-12	DX-30-UG	RALEIGH DEVELOPMENT COMPANY II, LLC	333 FAYETTEVILLE STREET, SUITE 100, RALEIGH NC 27601
1704523443	716 NORTH WEST STREET	WEST PEACE STREET AND NORTH WEST STREET	0.11	011494/00801	IX-12	DX-30-UG	RALEIGH DEVELOPMENT COMPANY II, LLC	333 FAYETTEVILLE STREET, SUITE 100, RALEIGH NC 27601
1704523448	722 NORTH WEST STREET	WEST PEACE STREET AND NORTH WEST STREET	0.19	011494/00801	IX-12	DX-30-UG	RALEIGH DEVELOPMENT COMPANY II, LLC	333 FAYETTEVILLE STREET, SUITE 100, RALEIGH NC 27601
1704524524	726 NORTH WEST STREET	WEST PEACE STREET AND NORTH WEST STREET	0.37	011494/00801	IX-12	DX-30-UG	RALEIGH DEVELOPMENT COMPANY II, LLC	333 FAYETTEVILLE STREET, SUITE 100, RALEIGH NC 27601
1704524633	804 NORTH WEST STREET	WEST PEACE STREET AND NORTH WEST STREET	0.22	016084/02605	IX-12	DX-30-UG	RALEIGH DEVELOPMENT COMPANY II, LLC	333 FAYETTEVILLE STREET, SUITE 100, RALEIGH NC 27601
1704524754	818 NORTH WEST STREET	WEST PEACE STREET AND NORTH WEST STREET	0.54	017651/00464	IX-12	DX-30-UG	RALEIGH DEVELOPMENT COMPANY II, LLC	333 FAYETTEVILLE STREET, SUITE 100, RALEIGH NC 27601
		Total Acreag	e 2.61	_				

Cor	nditional Use District Zoning Conditi	ons
Zoning case #:	Date submitted:	Office Use Only Rezoning case #
Existing zoning: X-12	Proposed zoning: DX-30-UG	

Narrative of Zoning Conditions Offered

- 1. The following Principal Uses as listed in UDO Section 6.1.4. that are permitted, limited, or special uses in the DX- district shall be prohibited: (i) Dormitory, fraternity, sorority; (ii) Adult establishment; (iii) Pawnshop; (iv) Vehicle Fuel Sales; and (v) Detention center, jail, prison.
- 2. Public facades of structured parking: Parking structure facades adjacent to or facing any public park or plaza, public right-of-way, public sidewalk, or private street shall comply with the following: Screening elements shall be designed in a structurally sound manner and have a gap of no more than 18 inches from the frame of the screening element to the wall opening. Alternative decorative elements which provide an equivalent level of screening may be allowed in an accessory parking structure where such elements are employed to match the architectural character of the main building. Mesh or decorative panels, louvers, green walls, tinted or sandblasted opaque spandrel glass, or similar screening elements shall be used. Chain link fencing and similar screening elements shall be prohibited as an allowable mesh or similar screening element.
- 3. Lighting within structured parking: Lighting shall be designed to reduce light spillage outside the parking structure according to the following:
- a. Internal illumination of parking structures shall be screened so that internal light sources shall not be visible from the adjacent public right-of-way or adjacent parcels. Light fixtures directly visible from the exterior of a parking structure shall be directed internally upward or shall contain shielded fixtures to minimize such visibility.
- b. Internal illumination of parking structures shall conform to the standards of UDO Section 7.4.7. Vehicular Canopies.
- c. Lighting levels measured at the property line of privately-owned parcels adjacent to the structured parking deck shall not be greater than 0.5 footcandles.
- 4. There shall be no on-site surface parking or vehicular surface area between any building and the eastern boundary of the site.
- 5. Upon development of the subject properties as reflected in a Tier 3 administrative site review, the properties shall include pedestrian connectivity along the eastern boundary of the site.
- 6. Upon development of the subject properties as reflected in a Tier 3 administrative site review, there shall be a minimum 2500 sq ft of outdoor amenity area meeting the urban plaza standards contained in UDO Section 1.5.3.C situated along Peace Street and/or the adjacent city owned parcel.

The property owner(s) hereby offers, consents to, and agrees to abide, if the rezoning request is approved, the conditions written above. All property owners must sign each condition page. This page may be photocopied if additional <u>space is needed</u>.

Property Owner(s) Signature: _	Clinis Carter
	AD4EFD286F934F4
Printed Name(s):	Chris Carter

Rezoning Application Addendum #1	
Comprehensive Plan Analysis	Office Use Only
The applicant is asked to analyze the impact of the rezoning request and its consistency with the Comprehensive Plan. The applicant is also asked to explain how the rezoning request is reasonable and in the public interest.	Rezoning case #

Statement of Consistency

Provide brief statements regarding whether the rezoning request is consistent with the future land use designation, the urban form map, and any applicable policies contained within the 2030 Comprehensive Plan.

- 1. The proposed rezoning is consistent with the Future Land Use Map designation for the properties of Central Business District (CBD). The CBD category is intended to enhance Downtown Raleigh as a vibrant mixed use urban center. CBD recognizes Downtown as the "heart of the city" with high-intensity office, retail, housing, institutional, cultural and visitor-serving uses. DX is the primary district for the CBD.
- 2. The properties are within the Urban Form Map, which supports the proposed urban frontage. Consequently, the rezoning will enhance the streets in this area, providing amenities for pedestrians and visitors. The proposed rezoning meets a number of Urban Design policies, including Policy UD 2.1 (Building Orientation), Policy UD 2.3 (Activating the Street) and Policy UD 3.4 (Enhanced Streetwalls).
- 3. The proposed height is consistent with policies contained in Table LU-2 as a core/transit area within the Central Business District. The site is within ¼ mile of the proposed Bus Rapid Transit corridor on Capital Boulevard heading north from Downtown. In addition, the site is immediately adjacent to the high speed rail corridor and S-Line.
- 4. The proposed rezoning will facilitate the redevelopment of an underutilized site in Downtown (Policy DT 1.3). In particular, the proposed rezoning meets several economic development policies, including Policy ED 2.4 (Attracting Investment in Emerging Neighborhoods), Policy ED 1.1 (Corridor revitalization) and Policy 1.2 (Mixed Use development).
- 5. The proposed rezoning also meets a number of policies related to parks given the proximity of the site to a planned, major urban park. Those policies include PR 3.13 (Greenway Oriented Development), PR 4.3 (Partnerships and Collaboration to develop innovative park arrangements and spaces), and PR 5.5 (Encourage Public Open Space in Rezonings).

Public Benefits

Provide brief statements explaining how the rezoning request is reasonable and in the public interest.

The rezoning is reasonable and in the public interest because it provides greater zoning flexibility for a site that is ripe for development given its current underutilization.

The rezoning is reasonable and in the public interest given the strategic importance of this site adjacent to the planned Devereux Meadow Park. The proximate urban open space encourages more intensity and interplay with an adjacent site. Further, the rezoning will facilitate a large mixed use development to complement the public use of the City's adjacent property and use of the planned Devereux Meadow Park.

Page **3** of **11** REVISION 05.05.21

Rezoning Application Addendum #2	
Impact on Historic Resources	
The applicant is asked to analyze the impact of the rezoning request on historic resources. For the purposes of this section, a historic resource is defined as any site, structure, sign, or other feature of the property to be rezoned that is listed in the National Register of Historic Places or designated by the City of Raleigh as a landmark or contributing to a Historic Overlay District.	Office Use Only Rezoning case #
Inventory of Historic Resources	
List in the space below all historic resources located on the property to be rezorthe proposed zoning would impact the resource.	ned. For each resource, indicate how
N/A	
Public Mitigation	
Provide brief statements describing actions that will be taken to mitigate all neg	ative impacts listed above.
N/A	

Page **4** of **11** REVISION 05.05.21

Design Guidelines

The Applicant must respond to the **Urban Design Guidelines** contained in the 2030 Comprehensive Plan if:

- a) The property to be rezoned is within a "City Growth Center", "Mixed-Use Center", or "Transit Station Areas", OR;
- b) The property to be rezoned is located along a "Main Street" or "Transit Emphasis Corridor" as shown on the Urban Form Map in the 2030 Comprehensive Plan.

Policy UD 7.3:

The Design Guidelines in Table UD-1 shall be used to review rezoning petitions and development applications for mixed-use developments; or rezoning petitions and development applications along Main Street and Transit Emphasis Corridors or in City Growth, TOD and Mixed-Use Centers, including preliminary site plans and development plans, petitions for the application of Downtown Overlay Districts, Planned Development Districts, and Conditional Use zoning petitions.

The Applicant must respond to the **Downtown Urban Design Guidelines** contained in the 2030 Comprehensive Plan if:

a) The property to be rezoned is within "Downtown" as shown on the Urban Form Map in the 2030 Comprehensive Plan.

Policy DT 7.18:

The design guidelines in Table DT-1 shall be used to review rezoning, alternative means of compliance, special use permits, and planned development master plan applications in downtown.

Please click here to download the Design Guidelines Addendum if required.

Urban Form Designation: Downtown | Click here to view the Urban Form map.

Please continue to the next page for the Rezoning Checklist Submittal Requirement.

Page **5** of **11** REVISION 05.05.21

Downtown Urban Design Guidelines

The Applicant must respond to the Downtown Urban Design Guidelines contained in the 2030 Comprehensive Plan if:

a) The property to be rezoned is within "Downtown" as shown on the Urban Form Map in the 2030 Comprehensive Plan.

Policy DT 7.18:

The design guidelines in Table DT-1 shall be used to review rezoning, alternative means of compliance, special use permits, and planned development master plan applications in downtown.

perm	its, and planned development master plan applications in downtown.
Click	<u>here</u> to view the Urban Form map
	Fayetteville Street should be free of service elements, including loading docks, mechanical equipment, and driveways.
1	Response: N/A
2	Loading or service entrances should be embedded within the block where possible. If embedding the loading dock is not possible, the loading dock should be located to the side or rear of a building. The width should be minimized and doors or gates should shield the loading docks from view. Roll-down gates should be decorative if facing the public realm.
	Response: Based on the proposed Shopfront Frontage, loading or service entrances will be minimized.
	Surface and structured parking should be landscaped, emphasizing interior tree canopies in surface lots, formal borders, and street trees to reinforce the streetwall.
3	Response: Based on the proposed Shopfront Frontage, there shall be no surface parking between any building and the street.
4	Mechanical equipment, satellite or microwave dishes, elevator penthouses, and other utilitarian equipment should be screened from view by a structure that complements the design of the building through the use of similar materials, colors, finishes, and architectural details. Views from buildings above should also be considered when designing rooftop mechanical equipment.
	Response: The owner's intent is to design the project so rooftop utilities do not detract from the views of the development.
5	The widths of all curb cuts at parking deck entrances should be minimized. Design techniques should be used (such as lane splits within the deck to encourage consolidated single exit or entrance lanes at the street side, and/or columns between lanes to reduce the perceived size of the openings), while maintaining adequate ingress and egress capacity to provide efficient operations and meet air quality conformity.
	Response: Based on the Shopfront Frontage, curb cuts shall be minimized.
	Building entries should be emphasized with architectural features, changes in roofline, different massing, or unique materials.
6	Response: Based on the Shopfront Frontage, buildings shall have street facing entrances. The owner intends to emphasize these elements.

Page **5** of **11** REVISION 05.0.21

_	The primary pedestrian building entrances should be located along the store front. For buildings that front on three streets, the primary pedestrian entrances should be located on the axial street or the corner if the building is located at an intersection.
7	Response:
	Based on the Shopfront Frontage, the buildings shall have street facing entrances.
8	Building entries should be at grade.
	Response:
	Based on the Shopfront Frontage, building entries shall be at grade.
	The level of architectural detail should be most intense at street level, within view of pedestrians on the sidewalk.
9	Response:
	The owner intends to emphasize the street level architectural details.
	The use of solid roll-down security gates is discouraged.
10	Response:
	There are no plans for solid roll-down security gates.
	Façades should be broken into distinct 20-30 foot modules or bays from side to side to prevent a monolithic edge to the street.
11	Response:
	Based on UDO building type requirements, facades shall be broken up and blank walls avoided.
	Large unarticulated walls are discouraged and should have a window or functional public access at least every 10 feet.
12	Response:
	Based on the UDO's, the building type requirements and UDO standards for tall buildings, the buildings shall have sufficient transparency and articulation.
	The articulation of the façade should be designed to appear more vertical than horizontal.
13	Response:
	Through the UDO standards for tall buildings, the buildings shall address vertical design.
14	Entries that provide access to a building's upper floors should be located along a street to promote street life. They should be designed as separate entries and distinguished from ground level spaces with different architectural details, materials, colors, lighting, signage, and/or paving so that it is clear which entries are public and which are private.
	Response:
	Based on the Shopfront Frontage, buildings shall provide pedestrian accessible street facing entrances.
	Recessed entries are encouraged. They should be no wider than one-third of the width of the storefront or 20 feet, whichever is less. Recessed entries should be a minimum of 4 feet deep, except where necessary to meet fire code.
15	Response:
	It is anticipated that entrances for tall commercial buildings will be recessed.

Page **6** of **11** REVISION 05.0.21

40	A minimum of 2/3 of the first story façade should be windows. Of the total amount of glass on the first-floor façade, a minimum of 85 percent must be transparent. Tinted or reflective glass is discouraged. First-story windows should be located a maximum of three (3) feet above the adjacent sidewalk.
16	Response:
	Based on UDO building type requirements, buildings shall have substantial transparency.
17	Windows should be used to display products and services and maximize visibility into storefronts. Windows should not be obscured with elements that prevent pedestrians from seeing inside.
	Response:
	Based on the UDO building type standards and proposed Shopfront Frontage, windows will be used to display products and services.
	The first-story, floor-to-floor height of any new building on Fayetteville Street should be a minimum of twenty (20) feet.
18	Response:
	Based on UDO building type standards, first story, floor-to-floor height will be substantial.
	If ceilings must be lowered below the height of ground level windows, provide an interior, full-height, three (3) foot minimum deep space immediately adjacent to the window before the drop in the ceiling.
19	Response:
	The owner has no intent to have ceilings below ground level height.
	The use of deep awnings and canopies on the first story is recommended to help mitigate wind, reduce glare, and shade ground level spaces.
20	Response:
	The owner intends to use deep awnings and canopies on the first story.
	Arcades, colonnades, and galleries are discouraged within the public right-of-way.
21	Response:
	The owner has no intent to have arcades, colonnades, or galleries within the public right-of-way.
	Stairs and stoops in the public right-of-way are discouraged along Fayetteville Street in order to make entries more accessible.
22	Response:
	The owner does not intend to have stairs and stoops in the public right-of-way.
23	An outdoor ground plane that abuts or is adjacent to the public right-of-way should be paved with terrazzo, concrete pavers, concrete, stone, brick, tile, or another high-quality hardscape material. Asphalt and loose paving materials such as gravel are discouraged. The paving design and materials should complement the building or storefront architecture.
	Response: The owner intends to have outdoor ground plane of high-quality material that does not include asphalt or loose materials.

Page **7** of **11** REVISION 05.0.21

In larger courtyard style spaces visible from the public right-of-way, use groundcovers, shrubs, and flowers to accent and fill blank areas with interest. Minimize the use of bare mulch and rocks. Areas of bare earth are discouraged. Response: The owner intends to have courtyard spaces with groundcovers, shrubs, etc and avoid bare earth, bare mulch and rocks. Walls of buildings should parallel the orientation of the street grid. Response: The owner intends for the walls of buildings to be parallel to the orientation of the street grid. Towers or high-rise buildings should have three zones: a streetwall or base zone, a tower transition zone, and a tower top zone. Cornices should be considered to separate base zone from tower transition zone, and a tower top zone. Cornices should be considered to separate base zone from tower transition zone, and a tower top zone. Cornices should be considered to separate base zone from tower transition zone, and a tower top zone. Cornices should be considered to separate base zone from tower transition zone, and a tower top zone. Cornices should be considered to separate base zone from tower transition zone, and a tower top zone. Cornices should be considered to separate base zone from tower transition zone, and a tower top zone. Cornices should be considered to separate base zone from tower transition zone, and a increase zone from tower transition zone, and a discouraged considered to separate base zone, a tower transition zone, and a discouraged zone from tower transition zone, and a discouraged zone from tower transition zone, and a fixed particular transition zone. Response: The owner will consider public art, performance facilities, and/or civic monuments in the buildings. Pences railings, and walls are discouraged except to screen surface parking lots and unimproved lots, to protect pedestrians from grade danages, and to delineate a private courty		
Response: The owner intends to have courtyard spaces with groundcovers, shrubs, etc and avoid bare earth, bare mulch and rocks. Walls of buildings should parallel the orientation of the street grid. Response: The owner intends for the walls of buildings to be parallel to the orientation of the street grid. Towers or high-rise buildings should have three zones: a streetwall or base zone, a tower transition zone, and a tower top zone. Cornices should be considered to separate base zone from tower transition zone, and a tower top zone. Cornices should be considered to separate base zone from tower transition zone, and a tower top zone. Response: The owner intends to have variable vertical articulation. Distance between towers on different blocks should be a minimum of 100 feet to ensure access to light and air. Response: Based on UDO standards for tall buildings, there shall be adequate spacing for light and air. Public art, performance facilities, and/or civic monuments should be an integral part of any building plan. Response: The owner will consider public art, performance facilities, and/or civic monuments in the buildings. Fences, railings, and walls are discouraged except to screen surface parking lots and unimproved lots, to protect pedestrians from grade changes, and to delineate a private courtyard. Fences are preferred over walls except there designed to hold grade. Response: The owner does not intend to have fences, railings, or walls. Fences should be a minimum of 36 inches and a maximum of 42 inches tall and a minimum of 70 percent open. Railings should be 42 inches tall. Solid walls should be a minimum of 18 inches and a maximum of 32 inches tall. Response: The owner does not intend to have any fences or solid walls. Fences, railings, and walls should be designed to complement the adjacent architecture through the use of similar materials, colors, finishes, and architectural details.	24	accent and fill blank areas with interest. Minimize the use of bare mulch and rocks. Areas of bare earth are
The owner intends to have courtyard spaces with groundcovers, shrubs, etc and avoid bare earth, bare mulch and rocks. Walls of buildings should parallel the orientation of the street grid. Response: The owner intends for the walls of buildings to be parallel to the orientation of the street grid. Towers or high-rise buildings should have three zones: a streetwall or base zone, a tower transition zone, and a tower top zone. Cornices should be considered to separate base zone from tower transition zone, and a tower top zone. Cornices should be considered to separate base zone from tower transition zone, and a tower top zone. Cornices should be considered to separate base zone from tower transition zone, and a tower top zone. Cornices should be considered to separate base zone from tower transition zone, and a tower top zone. Cornices should be considered to separate base zone from tower transition zone, and a tower top zone. Cornices should be considered to separate base zone from tower transition zone, and a tower top zone. Response: The owner intends to have variable vertical articulation. Distance between towers on different blocks should be a minimum of 100 feet to ensure access to light and air. Response: The owner wall consider public art, performance facilities, and/or civic monuments in the buildings. Fences, railings, and walls are discouraged except to screen surface parking lots and unimproved lots, to protect pedestrians from grade changes, and to delineate a private courtyard. Fences are preferred over walls except where designed to hold grade. Response: The owner does not intend to have fences, railings, or walls. Fences should be a minimum of 36 inches and a maximum of 42 inches tall and a minimum of 70 percent open. Railings should be 42 inches tall. Solid walls should be a minimum of 18 inches and a maximum of 32 inches tall. Response: The owner does not intend to have any fences or solid walls. Fences, railings, and walls should be designed to complement the adjacent architecture t	27	Response:
Response: The owner intends for the walls of buildings to be parallel to the orientation of the street grid. Towers or high-rise buildings should have three zones: a streetwall or base zone, a tower transition zone, and a tower top zone. Cornices should be considered to separate base zone from tower transition zone. Response: The owner intends to have variable vertical articulation. Distance between towers on different blocks should be a minimum of 100 feet to ensure access to light and air. Response: Based on UDO standards for tall buildings, there shall be adequate spacing for light and air. Public art, performance facilities, and/or civic monuments should be an integral part of any building plan. Response: The owner will consider public art, performance facilities, and/or civic monuments in the buildings. Fences, railings, and walls are discouraged except to screen surface parking lots and unimproved lots, to protect pedestrians from grade changes, and to delineate a private courtyard. Fences are preferred over walls except where designed to hold grade. Response: The owner does not intend to have fences, railings, or walls. Fences should be a minimum of 36 inches and a maximum of 42 inches tall and a minimum of 70 percent open. Railings should be 42 inches tall. Solid walls should be a minimum of 18 inches and a maximum of 32 inches tall. Response: The owner does not intend to have any fences or solid walls. Fences, railings, and walls should be designed to complement the adjacent architecture through the use of similar materials, colors, finishes, and architectural details. Response:		
The owner intends for the walls of buildings to be parallel to the orientation of the street grid. Towers or high-rise buildings should have three zones: a streetwall or base zone, a tower transition zone, and a tower top zone. Cornices should be considered to separate base zone from tower transition zone, and a tower top zone. Response: The owner intends to have variable vertical articulation. Distance between towers on different blocks should be a minimum of 100 feet to ensure access to light and air. Response: Based on UDO standards for tall buildings, there shall be adequate spacing for light and air. Public art, performance facilities, and/or civic monuments should be an integral part of any building plan. Response: The owner will consider public art, performance facilities, and/or civic monuments in the buildings. Fences, railings, and walls are discouraged except to screen surface parking lots and unimproved lots, to protect pedestrians from grade changes, and to delineate a private courtyard. Fences are preferred over walls except where designed to hold grade. Response: The owner does not intend to have fences, railings, or walls. Fences should be a minimum of 36 inches and a maximum of 42 inches tall and a minimum of 70 percent open. Railings should be 42 inches tall. Solid walls should be a minimum of 18 inches and a maximum of 32 inches tall. Response: The owner does not intend to have any fences or solid walls. Fences, railings, and walls should be designed to complement the adjacent architecture through the use of similar materials, colors, finishes, and architectural details. Response:		Walls of buildings should parallel the orientation of the street grid.
Towers or high-rise buildings should have three zones: a streetwall or base zone, a tower transition zone, and a tower top zone. Cornices should be considered to separate base zone from tower transition zone. Response: The owner intends to have variable vertical articulation. Distance between towers on different blocks should be a minimum of 100 feet to ensure access to light and air. Response: Based on UDO standards for tall buildings, there shall be adequate spacing for light and air. Public art, performance facilities, and/or civic monuments should be an integral part of any building plan. Response: The owner will consider public art, performance facilities, and/or civic monuments in the buildings. Fences, railings, and walls are discouraged except to screen surface parking lots and unimproved lots, to protect pedestrians from grade changes, and to delineate a private courtyard. Fences are preferred over walls except where designed to hold grade. Response: The owner does not intend to have fences, railings, or walls. Fences should be a minimum of 36 inches and a maximum of 42 inches tall and a minimum of 70 percent open. Railings should be 42 inches tall. Solid walls should be a minimum of 18 inches and a maximum of 32 inches tall. Response: The owner does not intend to have any fences or solid walls. Fences, railings, and walls should be designed to complement the adjacent architecture through the use of similar materials, colors, finishes, and architectural details. Response:	25	Response:
tower top zone. Cornices should be considered to separate base zone from tower transition zone. Response: The owner intends to have variable vertical articulation. Distance between towers on different blocks should be a minimum of 100 feet to ensure access to light and air. Response: Based on UDO standards for tall buildings, there shall be adequate spacing for light and air. Public art, performance facilities, and/or civic monuments should be an integral part of any building plan. Response: The owner will consider public art, performance facilities, and/or civic monuments in the buildings. Fences, railings, and walls are discouraged except to screen surface parking lots and unimproved lots, to protect pedestrians from grade changes, and to delineate a private courtyard. Fences are preferred over walls except where designed to hold grade. Response: The owner does not intend to have fences, railings, or walls. Fences should be a minimum of 36 inches and a maximum of 42 inches tall and a minimum of 70 percent open. Railings should be 42 inches tall. Solid walls should be a minimum of 18 inches and a maximum of 32 inches tall. Response: The owner does not intend to have any fences or solid walls. Fences, railings, and walls should be designed to complement the adjacent architecture through the use of similar materials, colors, finishes, and architectural details. Response:		The owner intends for the walls of buildings to be parallel to the orientation of the street grid.
The owner intends to have variable vertical articulation. Distance between towers on different blocks should be a minimum of 100 feet to ensure access to light and air. Response: Based on UDO standards for tall buildings, there shall be adequate spacing for light and air. Public art, performance facilities, and/or civic monuments should be an integral part of any building plan. Response: The owner will consider public art, performance facilities, and/or civic monuments in the buildings. Fences, railings, and walls are discouraged except to screen surface parking lots and unimproved lots, to protect pedestrians from grade changes, and to delineate a private courtyard. Fences are preferred over walls except where designed to hold grade. Response: The owner does not intend to have fences, railings, or walls. Fences should be a minimum of 36 inches and a maximum of 42 inches tall and a minimum of 70 percent open. Railings should be 42 inches tall. Solid walls should be a minimum of 18 inches and a maximum of 32 inches tall. Response: The owner does not intend to have any fences or solid walls. Fences, railings, and walls should be designed to complement the adjacent architecture through the use of similar materials, colors, finishes, and architectural details. Response:		
Response: Based on UDO standards for tall buildings, there shall be adequate spacing for light and air. Public art, performance facilities, and/or civic monuments should be an integral part of any building plan. Response: The owner will consider public art, performance facilities, and/or civic monuments in the buildings. Fences, railings, and walls are discouraged except to screen surface parking lots and unimproved lots, to protect pedestrians from grade changes, and to delineate a private courtyard. Fences are preferred over walls except where designed to hold grade. Response: The owner does not intend to have fences, railings, or walls. Fences should be a minimum of 36 inches and a maximum of 42 inches tall and a minimum of 70 percent open. Railings should be 42 inches tall. Solid walls should be a minimum of 18 inches and a maximum of 32 inches tall. Response: The owner does not intend to have any fences or solid walls. Fences, railings, and walls should be designed to complement the adjacent architecture through the use of similar materials, colors, finishes, and architectural details. Response:	26	•
Based on UDO standards for tall buildings, there shall be adequate spacing for light and air. Public art, performance facilities, and/or civic monuments should be an integral part of any building plan. Response: The owner will consider public art, performance facilities, and/or civic monuments in the buildings. Fences, railings, and walls are discouraged except to screen surface parking lots and unimproved lots, to protect pedestrians from grade changes, and to delineate a private courtyard. Fences are preferred over walls except where designed to hold grade. Response: The owner does not intend to have fences, railings, or walls. Fences should be a minimum of 36 inches and a maximum of 42 inches tall and a minimum of 70 percent open. Railings should be 42 inches tall. Solid walls should be a minimum of 18 inches and a maximum of 32 inches tall. Response: The owner does not intend to have any fences or solid walls. Fences, railings, and walls should be designed to complement the adjacent architecture through the use of similar materials, colors, finishes, and architectural details. Response:		Distance between towers on different blocks should be a minimum of 100 feet to ensure access to light and air.
Based on UDO standards for tall buildings, there shall be adequate spacing for light and air. Public art, performance facilities, and/or civic monuments should be an integral part of any building plan. Response: The owner will consider public art, performance facilities, and/or civic monuments in the buildings. Fences, railings, and walls are discouraged except to screen surface parking lots and unimproved lots, to protect pedestrians from grade changes, and to delineate a private courtyard. Fences are preferred over walls except where designed to hold grade. Response: The owner does not intend to have fences, railings, or walls. Fences should be a minimum of 36 inches and a maximum of 42 inches tall and a minimum of 70 percent open. Railings should be 42 inches tall. Solid walls should be a minimum of 18 inches and a maximum of 32 inches tall. Response: The owner does not intend to have any fences or solid walls. Fences, railings, and walls should be designed to complement the adjacent architecture through the use of similar materials, colors, finishes, and architectural details. Response:	27	Response:
Response: The owner will consider public art, performance facilities, and/or civic monuments in the buildings. Fences, railings, and walls are discouraged except to screen surface parking lots and unimproved lots, to protect pedestrians from grade changes, and to delineate a private courtyard. Fences are preferred over walls except where designed to hold grade. Response: The owner does not intend to have fences, railings, or walls. Fences should be a minimum of 36 inches and a maximum of 42 inches tall and a minimum of 70 percent open. Railings should be 42 inches tall. Solid walls should be a minimum of 18 inches and a maximum of 32 inches tall. Response: The owner does not intend to have any fences or solid walls. Fences, railings, and walls should be designed to complement the adjacent architecture through the use of similar materials, colors, finishes, and architectural details. Response:		
The owner will consider public art, performance facilities, and/or civic monuments in the buildings. Fences, railings, and walls are discouraged except to screen surface parking lots and unimproved lots, to protect pedestrians from grade changes, and to delineate a private courtyard. Fences are preferred over walls except where designed to hold grade. Response: The owner does not intend to have fences, railings, or walls. Fences should be a minimum of 36 inches and a maximum of 42 inches tall and a minimum of 70 percent open. Railings should be 42 inches tall. Solid walls should be a minimum of 18 inches and a maximum of 32 inches tall. Response: The owner does not intend to have any fences or solid walls. Fences, railings, and walls should be designed to complement the adjacent architecture through the use of similar materials, colors, finishes, and architectural details. Response:		Public art, performance facilities, and/or civic monuments should be an integral part of any building plan.
The owner will consider public art, performance facilities, and/or civic monuments in the buildings. Fences, railings, and walls are discouraged except to screen surface parking lots and unimproved lots, to protect pedestrians from grade changes, and to delineate a private courtyard. Fences are preferred over walls except where designed to hold grade. Response: The owner does not intend to have fences, railings, or walls. Fences should be a minimum of 36 inches and a maximum of 42 inches tall and a minimum of 70 percent open. Railings should be 42 inches tall. Solid walls should be a minimum of 18 inches and a maximum of 32 inches tall. Response: The owner does not intend to have any fences or solid walls. Fences, railings, and walls should be designed to complement the adjacent architecture through the use of similar materials, colors, finishes, and architectural details. Response:	28	Response:
protect pedestrians from grade changes, and to delineate a private courtyard. Fences are preferred over walls except where designed to hold grade. Response: The owner does not intend to have fences, railings, or walls. Fences should be a minimum of 36 inches and a maximum of 42 inches tall and a minimum of 70 percent open. Railings should be 42 inches tall. Solid walls should be a minimum of 18 inches and a maximum of 32 inches tall. Response: The owner does not intend to have any fences or solid walls. Fences, railings, and walls should be designed to complement the adjacent architecture through the use of similar materials, colors, finishes, and architectural details. Response:		The owner will consider public art, performance facilities, and/or civic monuments in the buildings.
The owner does not intend to have fences, railings, or walls. Fences should be a minimum of 36 inches and a maximum of 42 inches tall and a minimum of 70 percent open. Railings should be 42 inches tall. Solid walls should be a minimum of 18 inches and a maximum of 32 inches tall. Response: The owner does not intend to have any fences or solid walls. Fences, railings, and walls should be designed to complement the adjacent architecture through the use of similar materials, colors, finishes, and architectural details. Response:	20	protect pedestrians from grade changes, and to delineate a private courtyard. Fences are preferred over walls
The owner does not intend to have fences, railings, or walls. Fences should be a minimum of 36 inches and a maximum of 42 inches tall and a minimum of 70 percent open. Railings should be 42 inches tall. Solid walls should be a minimum of 18 inches and a maximum of 32 inches tall. Response: The owner does not intend to have any fences or solid walls. Fences, railings, and walls should be designed to complement the adjacent architecture through the use of similar materials, colors, finishes, and architectural details. Response:	29	Response:
Railings should be 42 inches tall. Solid walls should be a minimum of 18 inches and a maximum of 32 inches tall. Response: The owner does not intend to have any fences or solid walls. Fences, railings, and walls should be designed to complement the adjacent architecture through the use of similar materials, colors, finishes, and architectural details. Response:		
Response: The owner does not intend to have any fences or solid walls. Fences, railings, and walls should be designed to complement the adjacent architecture through the use of similar materials, colors, finishes, and architectural details. Response:	30	Railings should be 42 inches tall. Solid walls should be a minimum of 18 inches and a maximum of 32 inches
Fences, railings, and walls should be designed to complement the adjacent architecture through the use of similar materials, colors, finishes, and architectural details. Response:		Response:
similar materials, colors, finishes, and architectural details. Response:		·
Response:		
	31	Response:

Page **8** of **11** REVISION 05.0.21

	Designs should be contextual to adjacent buildings, including their cornice lines and horizontal banding.
32	Response:
	The owner intends for the design to be contextual to adjacent buildings.
	Innovative design and unusual lighting of the exterior of the building is important to emphasize the monumentality of government buildings.
33	Response:
	The owner intends to have innovative design.
	The principal building entrance should be easily identified by building features and landscape elements; additional public entrances should be provided at every street face.
34	Response:
	Based on the proposed Shopfront frontage, the building entrances shall be easily identified.
35	Building materials should be of stone, brick, or similar durable, high quality materials. Building form, articulation, and materials should respect and be sympathetic to the major governmental and institutional buildings in the area.
	Response:
	The owner intends to use high quality materials that will respect major buildings in the area.
	Preferred materials (other than glass) include metal, brick, stone, concrete, plaster, and wood trim; discouraged materials include vinyl siding, pressed wood siding, and exterior insulated finishing systems (EIFS).
36	Response:
	The owner intends to use a mixture of one or more of the following: metal, brick, stone, concrete, plaster, and wood trim.
	Materials covering original architectural features of historic or architecturally significant buildings are discouraged.
37	Response:
	The owner does not intend to cover architectural features of historic or architecturally significant buildings.
	A minimum of 35 percent of each upper story should be windows.
38	Response:
	Based on UDO building types, upper stories shall have substantial transparency.
39	Building corners that face an intersection should strive for a distinctive form and high level of articulation.
	Response:
	The owner intends for corners that face an intersection to be distinctive and have high level articulation.
	Buildings may step back further at intersections in order to articulate the corners.
40	Response:
	The owner intends for buildings to acknowledge the intersections at the corners.

Page **9** of **11** REVISION 05.0.21

41	Buildings downtown and in Pedestrian Business Overlays should have stepbacks and articulated facades to mitigate wind effects and increase light and air. Buildings should step back 10 to 15 feet at the 60-foot point above the ground on a wide street and 15 feet on a narrow street. A wide street is 75 feet in width or more.
	Response:
	Based on UDO standards for tall buildings, stepbacks will be wide enough to mitigate wind and increase light and air.
	Flat roof buildings should have decorative parapets with elements, such as detailed cornices, corbeling, applied medallions, or other similar architectural treatments.
42	Response:
	The owners intend for flat roof buildings to have decorative architectural treatments.
	Signage should be compatible in scale, style, and composition with the building or storefront design as a whole.
43	Response:
	Based on signage requirement in the UDO, the signage shall be compatible with the building or storefront design as a whole.
	Diverse graphic solutions are encouraged to help create the sense of uniqueness and discovery found in an urban, mixed-use environment.
44	Response:
	The owner intends to have diverse graphics, creating a sense of uniqueness and discovery.
	All mechanical and electrical mechanisms should be concealed.
45	Response:
	The owner intends for all mechanical and electrical mechanisms to be concealed.
	Signs should not obscure a building's important architectural features, particularly in the case of historic buildings.
46	Response:
	The owner intends for signs to not obscure the buildings architectural features.
	Signs should be constructed with durable materials and quality manufacturing.
47	Response:
	The owner intends for signs to be constructed of durable materials and quality manufacturing.
	Sign bands above transom and on awnings are preferred signage locations.
48	Response:
	The owner intends to utilize a signage plan in keeping with the high quality of the building design.
	Only the business name, street address, building name, and logo should be on an awning or canopy. The lettering should not exceed 40 percent of the awning area.
49	Response:
	The owner intends to utilize a signage plan in keeping with the high quality of the building design.

Page **10** of **11** REVISION 05.0.21

	Illuminated signs should avoid the colors red, yellow, and green when adjacent to a signal controlled vehicular intersection.
50	Response: The owner intends for signs to utilize a signage plan in keeping with the high quality of the building design.
	Allowed sign types: channel letter signs, silhouette signs (reverse channel), individualized letter signs, projecting signs, canopy/marquee signs, logo signs, awning signs, and interior window signs.
51	Response: Based on the UDO signage requirements, the buildings will only have allowed sign types.
52	Discouraged sign types: signs constructed of paper, cardboard, styrofoam-type materials, formed plastic, injected molded plastic, or other such materials that do not provide a sense of permanence or quality; signs attached with suction cups or tape; signs constructed of luminous vacuum-formed plastic letters; signs with smoke-emitting components. Changeable copy signs are prohibited.
	Response: The owner intends to utilize a signage plan in keeping with the high quality of the building design.

Page **11** of **11** REVISION 05.0.21

Rezoning Checklist (Submittal Requirements)						
To be completed by Applicant				To be completed by staff		
General Requirements – General Use or Conditional Use Rezoning:	Yes	N/A	Yes	No	N/A	
1. I have referenced this Rezoning Checklist and by using this as a guide, it will ensure that I receive a complete and thorough first review by the City of Raleigh	✓					
2. Pre-application conference	✓					
3. Neighborhood meeting notice and report	√					
4. Rezoning application review fee (see <u>Development Fee Guide</u> for rates).	✓					
5. Completed application submitted through Permit and Development Portal	✓					
6. Completed Comprehensive Plan consistency analysis	✓					
7. Completed response to the urban design or downtown design guidelines		✓				
8. Two sets of stamped envelopes addressed to all property owners of area to be rezoned and properties with 500 feet of area to be rezoned	✓					
9. Trip generation study		✓				
10. Traffic impact analysis		√				
For properties requesting a Conditional Use District:	Yes	N/A	Yes	No	N/A	
11. Completed zoning conditions, signed by property owner(s)	✓					
If applicable, see page 8:	Yes	N/A	Yes	No	N/A	
12. Proof of Power of Attorney or Owner Affidavit		✓				
For properties requesting a Planned Development or Campus District:	Yes	N/A	Yes	No	N/A	
13. Master plan (see Master Plan submittal requirements)		√				
For properties requesting a text change to zoning conditions:	Yes	N/A	Yes	No	N/A	
14. Redline copy of zoning conditions with proposed changes		√				
15. Proposed conditions signed by property owner(s)	√					

Please continue to the next page for the Master Plan Submittal Requirements checklist.

Page **6** of **11** REVISION 05.05.21

Master Plan (Submittal Requirements)							
To be completed by Applicant					To be completed by staff		
General Requirements – Master Plan:	Yes	N/A	Yes	No	N/A		
1. I have referenced this Master Plan Checklist and by using this as a guide, it will ensure that I receive a complete and thorough first review by the City of Raleigh		✓					
2. Total number of units and square feet		√					
3. 12 sets of plans		√					
4. Completed application submitted through Permit and Development Portal		√					
5. Vicinity Map		√					
6. Existing Conditions Map		√					
7. Street and Block Layout Plan		√					
8. General Layout Map/Height and Frontage Map		√					
9. Description of Modification to Standards, 12 sets		√					
10. Development Plan (location of building types)		\checkmark					
11. Pedestrian Circulation Plan		√					
12. Parking Plan		√					
13. Open Space Plan		√					
14. Tree Conservation Plan (if site is two acres or more)		√					
15. Major Utilities Plan/Utilities Service Plan		✓					
16. Generalized Stormwater Plan		√					
17. Phasing Plan		√					
18. Three-Dimensional Model/renderings		√					
19. Common Signage Plan		✓					

Page **7** of **11** REVISION 05.05.21

Date: April 28, 2022

Re: Property Located at 418 and 424 Peace Street, 708, 714, 716, 722, 726, 804, and 818 West Street, collectively, (the "Property).

Neighboring Property Owners:

We are counsel for Raleigh Development Company II, LLC, ("RDC, II"), which is considering rezoning the above-captioned Property, an aerial and zoning map of which is included in this notice. Currently, the Property is zoned Industrial Mixed Use up to 12 stories, (IX-12). The proposed zoning is Downtown Mixed Use up to 30 stories with an Urban General frontage, (DX-30-UG). The purpose of the rezoning is to allow more flexibility in height.

You are cordially invited to attend a meeting to discuss the potential rezoning. We have scheduled a meeting with surrounding neighbors on **Monday**, **May 9**, **2022**, **from 7:00 p.m. to 8:00 p.m.** This meeting will be held at Halifax Community Center, Multipurpose Room A, 1023 Halifax St., Raleigh, NC 27604.

The City of Raleigh requires a neighborhood meeting involving the owners and tenants of property within 500 feet of the site prior to filing a rezoning application. After the meeting, we will prepare a report for the Raleigh Planning Department regarding the items discussed at the meeting.

Prior to the submittal of any rezoning application, the City of Raleigh requires that a neighborhood meeting be held for all property owners and tenants within 500 feet of the area requested for rezoning.

Information about the rezoning process is available online; visit www.raleighnc.gov and search for "Rezoning Process." If you have further questions about the rezoning process, please contact:

Sarah Shaughnessy Raleigh Planning & Development (919) 996-2234 Sarah.Shaughnessy@raleighnc.gov

If you have any concerns or questions about this potential rezoning I can be reached at:

Mack Paul Morningstar Law Group (919) 590-0377 mpaul@mstarlaw.com

Sincerely,

M. I P.M


Neighborhood Meeting Agenda

- I. Introductions
- II. The rezoning process
- III. The project
- IV. Question and answer period

Aerial Photo



Zoning

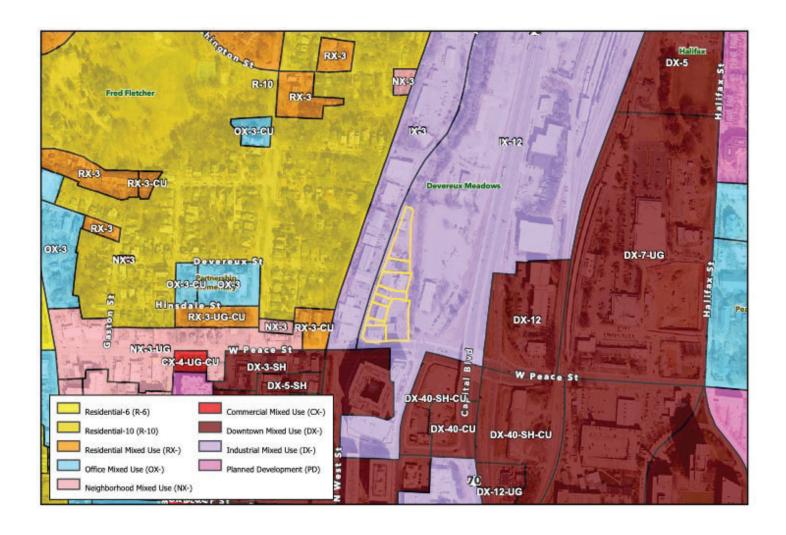

Rezoning Application and Checklist



Planning and Development Customer Service Center • One Exchange Plaza, Suite 400 | Raleigh, NC 27601 | 919-996-2500

Please complete all sections of the form and upload via the Permit and Development Portal (permitportal.raleighnc.gov). Please see page 8 for information about who may submit a rezoning application. A rezoning application will not be considered complete until all required submittal components listed on the Rezoning Checklist have been received and approved. For questions email rezoning@raleighnc.gov.

		Rezoning Requ	est		
Rezoning	General	Use Conditional	Jse	Master Plan	Office Use Only Rezoning case #
Type	Text cha	inge to zoning conditions			
Existing zoning base di	strict: IX	Height: 12	Frontage:		Overlay(s):
Proposed zoning base	district: DX	Height: 30	Frontage	3	Overlay(s):
Helpful Tip: View the 2 layers.	Zoning Map to sear	rch for the address to be	rezoned, then	turn on the 'Zo	oning' and 'Overlay'
If the property has been	n previously rezone	ed, provide the rezoning	case		
		Ge Info h	ior		
Date:	Date a		Da	te amendez (2):
Property address: See	Attachment A				
Property PIN: See Atta	chment A				
Deed reference (book/p	page): See Attachr	n.ant A			
Nearest intersection: So	ee Attachment A	Prope	rty size (acres)):	
For planned deve	elopment	otal units:	-	Total square fo	otage:
applications	only T	otal parcels:	-	Total buildings:	
Property owner name a	and address: Raleig	h Development Company II,	LLC, 333 Fayett	teville Street, Sui	te 100, Raleigh NC 27601
Property owner email:	carter@rdc.bz				
Property owner phone:					
Applicant name and ad	dress: Raleigh Dev	elopment Company II, LL0	C, 333 Fayettevi	ille Street, Suite	100, Raleigh NC 27601
Applicant email: mpaul	@morningstarlawo	group.com			
Applicant phone: 919-5	90-0370				
Applicant signature(s):					
Additional email(s):					

Page **1** of **11** REVISION 05.05.21

Conditional Use District Zoning Conditions				
Zoning case #:	Date submitted:	Office Use Only Rezoning case #		
Existing zoning: IX-12	Proposed zoning: DX-30-UG			

Narrative of Zoning Conditions Offered

- 1. The following Principal Uses as listed in UDO Section 6.1.4. that are permitted, limited, or special uses in the DX- district shall be prohibited: (i) Dormitory, fraternity, sorority; (ii) Adult establishment; (iii) Pawnshop; (iv) Vehicle Fuel Sales; and (v) Detention center, jail, prison.
- 2. Public facades of structured parking: Parking structure facades adjacent to or facing any public park or plaza, public right-of-way, public sidewalk, or private street shall comply with the following: Screening elements shall be designed in a structurally sound manner and have a gap of no more than 18 inches from the frame of the screening element to the wall opening. Alternative decorative elements which provide an equivalent level of screening may be allowed in an accessory parking structure where such elements are employed to match the architectural character of the main building. Mesh or decorative panels, louvers, green walls, tinted or sandblasted opaque spander glass, or similar screening elements shall be used. Chain link fencing and similar screening elements shall be prohibited as an allowable mesh or similar screening element.
- 3.Lighting within structured parking: Lighting shall be designed to reduce light spillage outside the parking structure according to the following:
- a. Internal illumination of parking structures all for scheduled so that internal light sources shall not be visible from the adjacent published by the directed internally upward or shall contain shielded fixtures to minimize such visibility.
- b. Internal illumination of parking structures shall conform to the standards of UDO Section 7.4.7. Vehicular Canopies.
- c. Lighting levels measured at the property line of privately-owned parcels adjacent to the structured parking deck shall not be greater than 0.5 footcandles.

The property owner(s) hereby offers, consents to, and agrees to abide, if the rezoning request is approved, the conditions written above. All property owners must sign each condition page. This page may be photocopied if additional space is needed.

Property Owner(s) Signature:	·		
Printed Name(s):			

Page **2** of **11** REVISION 05.05.21

SUMMARY OF ISSUES

A neighborhood meeting was held on $\underline{\text{May 9, 2020}}$ (date) to discuss a potential rezoning located at See Attachment A (property address). The neighborhood Meeting was held at Halifax Community Center, 1023 Halifax St., Raleigh NC (location). There were approximately 12 (number) neighbors in attendance. The general issues discussed were: Summary of Issues: Discussed rezoning process. Discussed current zoning, zoning in Raleigh, and proposed rezoning. Discussed rezoning is consistent with the City's vision of the downtown area and future land use. Discussion vision for Central Business District. Discussed Urban Form Map. Showed photos of current site. Showed slides from City concept plan of Devereux Meadow Park. Participant asked about the station area and if there is a future plan around a future station. Participant asked where is the edge of downtown. Explained edge of downtown v. edge of CBD. Participant asked which policies support the height. Staff explained the future land use map and that the height was consistent with the future land use map. Staff further discussed the core allows 40 stories and height is measured at primary street elevation. Discussed plaza will be park of city park. Participant asked if there will be any community amenities. Participant expressed concern regarding no more Glenwood South bars, music, etc. Would want hour restrictions and no more permit parking and/or parking monitors. Participant expressed concern that the building will block morning light to the neighborhood and afternoon light to the park. Participant expressed concern that the development will not usurp the park. Discussed council wants the project to contribute to the park. Participant asked what is the likelihood of approval of a 12 story zoning will end up 20 or 30 stories. Participant asked if there are setbacks and tower separation requirements. Participant asked how neighbors can work with the developer.


Page **10** of **11 REVISION 05.05.21**

Participant asked why the area looked like a peninsula on the FLUM and will there be a rendering.

Attenda	ance Roster
Name	Address
SANDRA KIDA	SON CLEVELAND ST PAUJEN 27605
ROY ATTRIPIE	601 CLIEVELAND ST RALLANY, 27605
ROY: PATSY SABA	700 DEVEREUX ST RALEIGH 2765
JEFF HUDGIUS	500 TILDEL ST. PHENCH 27605
Jania , Ed Bander	713 Mc clure or Ralych 27610
I arrive herson	303 Devereux St. Rakigh 2740
10H Freewoo	1204 Filmore St. 276050
TOWN KMIBHT.	504 DAMMAN ST 27/205
Gaye Hill	505 Tilder St Naligh 27605
VANCET BRANTLEY	510 Devereux
Scott Pruc ston	SEE SOY CLEVELAND ST
JAMES KMC-199	203 MCCIVES P7.
9 - 1 1 1 1 1 1 1 1 1 1	
<u> </u>	
그렇게 하는 사람들은 아이들이 얼마나요?	

Existing Zoning

Z-54-2022

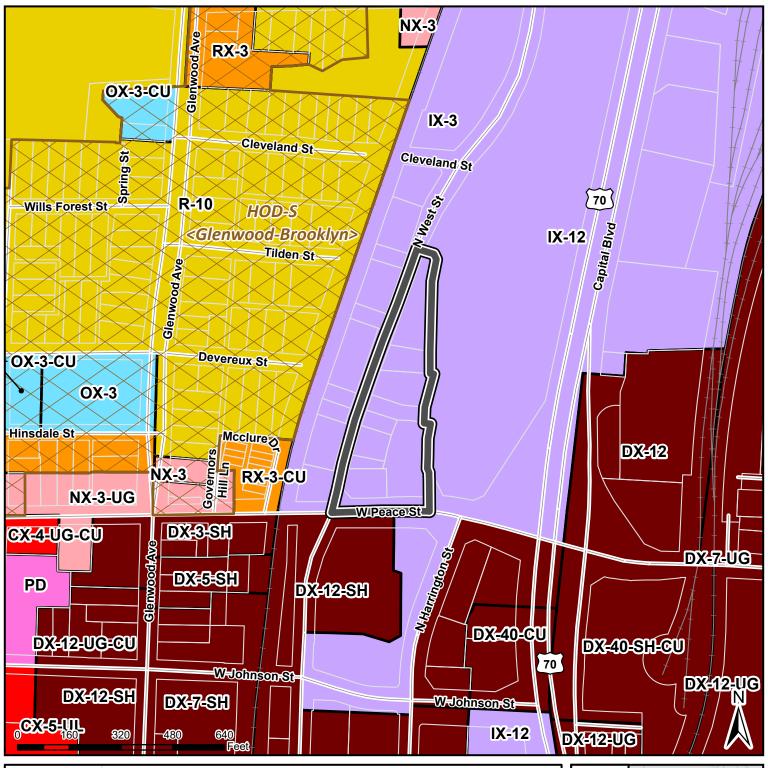

Property	418, 424 W Peace St; 708, 714, 716, 722, 726, 804, 818 N
Size	2.61 acres
Existing Zoning	IX-12
Requested Zoning	DX-30-UG-CU

