

TRANSPORTATION

Preliminary Traffic Calming Design & Public Comment





How do we approach the traffic calming design?

- Consistent treatment placement along entire street
 - 500' – 700' spacing of treatments
 - Close spacing is used for streets with a higher speed compliance issue
 - Target pedestrian heavy amenities to increase safety, such as bus stops
- Targeted placement to fix a speed related crash issue
 - If a pattern of speed related crashes is identified, targeted treatment placement can eliminate that crash pattern
 - If no pattern is identified locationally, but multiple speed related crashes have occurred, consistent treatment spacing can help eliminate crashes along an entire street




Raleigh

Treatment Limitations

- Your street's width will determine what types of treatments can be placed
 - Lineberry Dr is approximately 21' wide between the protected bike lanes
 - Based on this street width, speed humps/speed cushions are the only option available for use

Speed Humps (vertical)

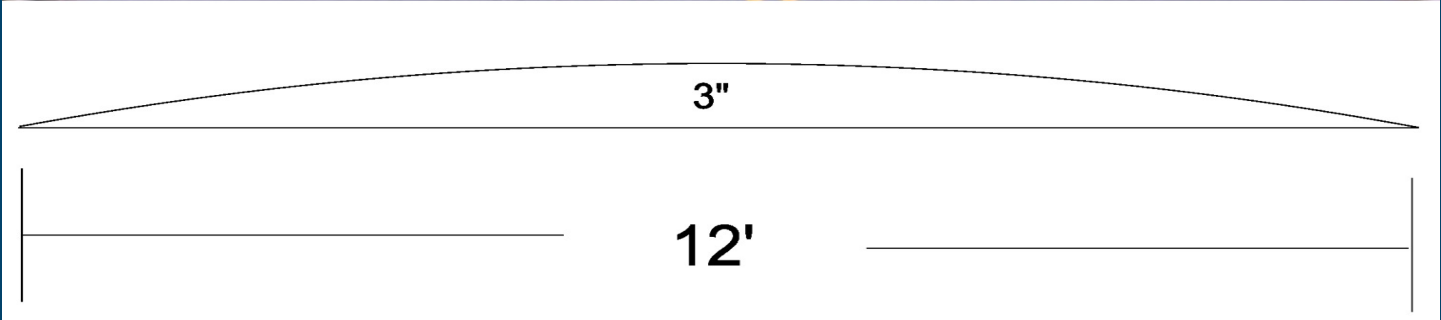



Speed Humps (vertical)


Pros

- Can be the most effective
- Fast installation time/Less impact during construction
- Versatile placement options based on compact footprint

Cons

- Does not contrast as much with existing roadway
- Impact to driving comfort
- Creates slight delay in emergency service's response times

Speed Cushions (vertical)

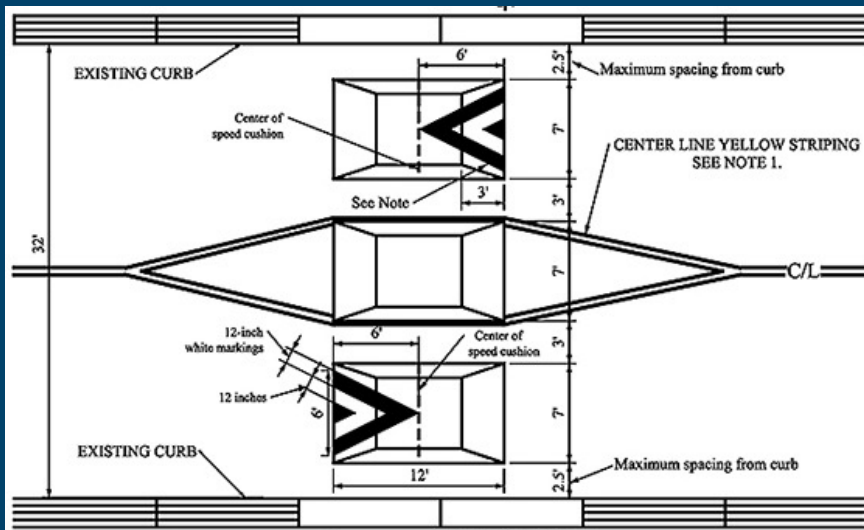

*Speed Cushion dimensions vary based on roadway dimensions



Speed Cushions (vertical)

Pros

- Can be as effective as speed humps
- Relatively low impact installation timeline, but slightly slower than a standard hump as more labor is required
- Versatile placement options based on compact footprint
- Slightly faster emergency service's response times due to tire slits for larger vehicles


Cons

- Does not contrast as much with existing roadway
- Reduced driving comfort
- There is still some level of delay to emergency service's response times when compared with no treatment



Raleigh

Evaluation Data

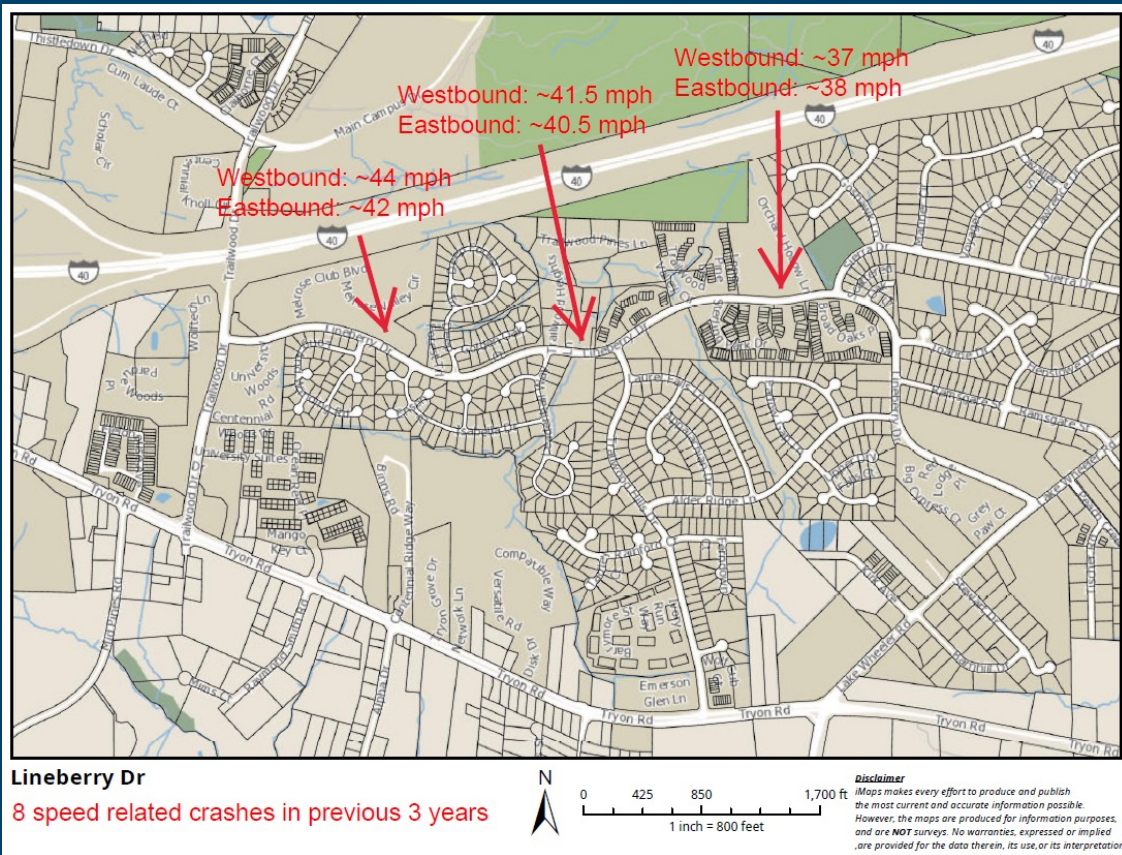



Raleigh

Design Process

- Based on the speed progression and consistent speed related crashes along Lineberry Dr, we are proposing speed humps or speed cushions at approximately 700' intervals at the start of and end of the curves in the road
- The crashes identified were along the entire corridor, but curves were identified as the common factor. Slowing drivers down as they enter a curve will be a key goal to increase overall safety
- The speed limit will also be reduced to 30 mph in conjunction with this project



Raleigh

Project Goal

- The project will be deemed effective if 85% of drivers are going at or below the 30 mph speed limit and top driver speed is capped at around 5-7 mph over the speed limit
 - Based on your location, Pineview Dr is the closest completed traffic calming project to you. We encourage you to go drive this street yourself to experience the final project
- Once the project has been completed for approximately 6 months, an after-study will be performed to measure project effectiveness



Raleigh

Public Comment

- What are your thoughts on the proposed design?
 - Should we place more or less treatments along the street?
- Have we adequately addressed problem areas you see?
 - Should we place another hump in a targeted location?
- Would you prefer speed humps or speed cushions?
- What other questions, comments, suggestions do you have?

Please direct all comments and questions to staff using the PublicInput portal for Lineberry Dr. Staff will respond and we can have a neighborhood wide conversation.

